

COURSALIS E



HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY WITH HEATING

Exclusive arch design, light and superfine
High performance and low sound level
Metallic housing with paint finish in white colour
380V 50Hz motor
Equipped with electrical coil

Metallic impeller
Includes external control by remote control
Designed for horizontal mural installation
With operating indicator LED (ambient or heating, air velocity and stop motion)
Mounting brackets on wall
Reach up to 3m.
The indicated weight does not include the packaging ($\pm 2\text{Kg.}$)

Accessories



INT



SFC

APPLICATION

Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

Technical data


Three-phase motor

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
509610000B	COURSALIS 1000 E	1400	11,637	4,42	1.100	-	17,60	1
509615000B	COURSALIS 1500 E	1400	14,474	5,50	1.800	-	24,70	1
509620000B	COURSALIS 2000 E	1400	26,316	10,00	2.400	-	29,60	1

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

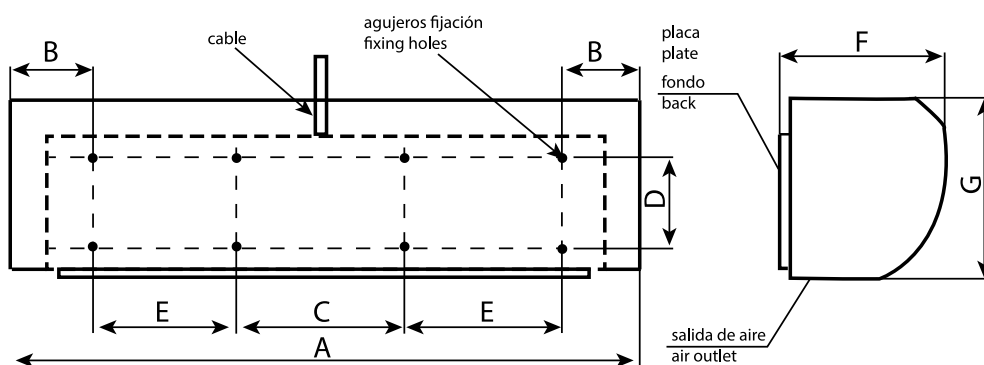

Model	A	F	G
COURSALIS 1000 E	1150	195	220
COURSALIS 1500 E	1650	195	220
COURSALIS 2000 E	2150	195	220

Wiring diagram

Wiring diagram Nº 1

