

COURSALIS




HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY

Exclusive arch design, light and superfine
High performance and low sound level
Metallic housing with paint finish in white colour
230V 50Hz motor

Impeller made of plastic (AS+fiberglass)
Includes external control by remote control
Designed for horizontal mural installation
Easy adjustable air direction
With operating indicator LED (ambient, air velocity and stop motion)
Mounting brackets on wall
Reach up to 3m.
The indicated weight does not include the packaging ($\pm 2\text{Kg.}$)

Accessories



APPLICATION

Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

Technical data


Single-phase motor

Code	Model	R.P.M.	Rated I. A 230V	Rated power kW	Max. Airflow m ³ /h	Sound db (A)**	Weight kg	Connect. diagram
509610000M001B	COURSALIS 1000	1400	0,75	0,17	1.600	-	15,60	1
509615000M001B	COURSALIS 1500	1400	1,045	0,23	2.500	-	21,80	1
509620000M001B	COURSALIS 2000	1400	1,5	0,33	3.380	-	26	1

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

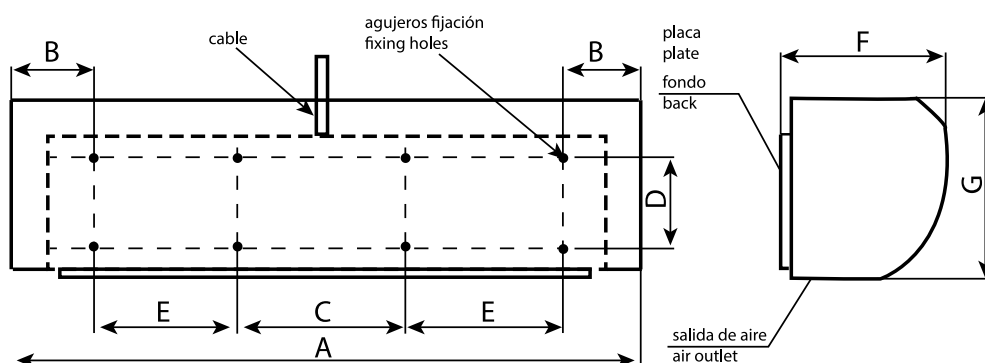

Model	A	F	G
COURSALIS 1000	1150	195	220
COURSALIS 1500	1650	195	220
COURSALIS 2000	2150	195	220

Wiring diagram

Wiring diagram N° 1

