

JF CONFORT



AXIAL JET FAN CONFORT

MANUFACTURING FEATURES:

The JF models are composed of an axial fan and two silencers.

FAN:

- Axial fan with galvanized steel casing. The connection box is accessible by the side from a removable door.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation, Standard voltages 230/400V 50Hz for 1 speed motors and 400V 50Hz for 2 speed fans

SILENCERS:

- Casing in galvanized steel. Inner duct made of perforated galvanized steel sheet. The silencers are filled with mineral wool with high acoustic absorption properties, preventing most of the fan noise to be propagated.
- Unidirectional JF CONFORT UN is equipped with a protection guard at the inlet side and a deflector at the outlet. The deflector directs the air away from the ceiling and obstacles like beams or ducting, sweeping the whole volume of air to the closest extraction point.

APPLICATIONS:

- Conceived for car parkings and large spaces where polluted air, or smoke from an accidental fire, needs to be removed effectively. An optimized design minimizes the height needed for their installation and assures a silent operation.
- Maximum working temperature: 60°C.

Accessories



AVT



INT

Technical data

Three-phase motor

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
274300196ST	JF 300 T2 UN CONFORT	2780	1,36	0,55	4.500	55	60	1
274400196ST	JF 400 T2 UN CONFORT	2860	2,39	1,10	8.470	65	70	1


2 speed motor

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
274300296ST	JF 300 T2/T4 UN CONFORT	2850	1,45/0,47	0,55	4.500	55	60	2
274400296ST	JF 400 T2/T4 UN CONFORT	2850	2,36/0,59	1,10	8.470	65	70	2

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

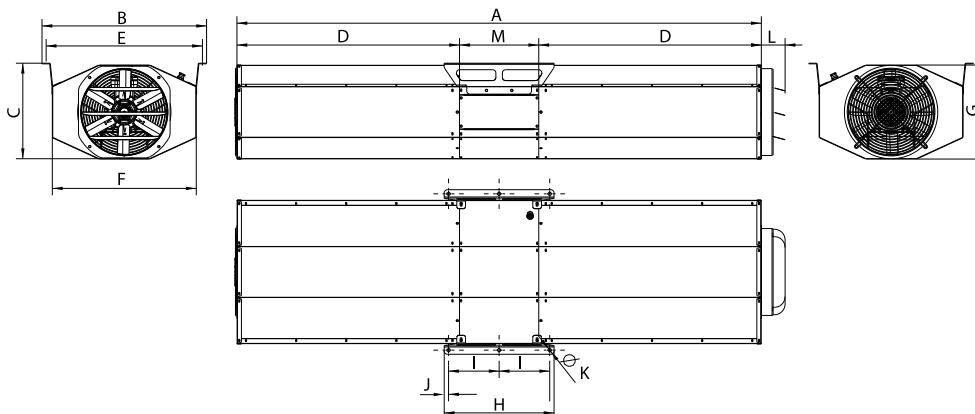


Model	A	B	C	D	E	F	G	H	I
JF 300 T2 UN CONFORT	2415	590	340,5	1025	550	464	334	506	233
JF 300 T2/T4 UN CONFORT	2415	590	340,5	1025	550	464	334	506	233
JF 400 T2 UN CONFORT	2415	758	440,5	1025	720	664	434	506	233
JF 400 T2/T4 UN CONFORT	2415	758	440,5	1025	720	664	434	506	233

Model	J	L	M	Thrust (N)	ØK
JF 300 T2 UN CONFORT	20	122	365	26	15
JF 300 T2/T4 UN CONFORT	20	122	365	25/6	15
JF 400 T2 UN CONFORT	20	122	365	53	15
JF 400 T2/T4 UN CONFORT	20	122	365	53/13	15


Wiring diagram

Wiring diagram N° 1

230/400V

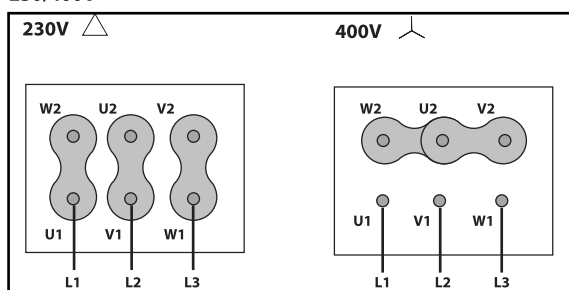


400/690V

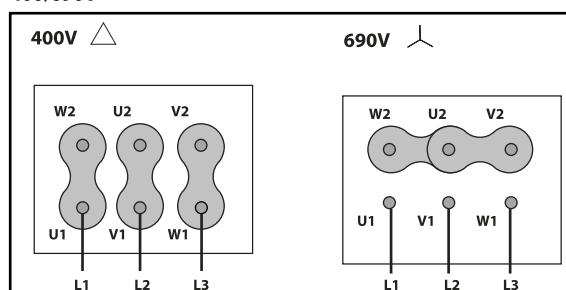

Wiring diagram N° 2

400V DAHLANDER (Y,YY)

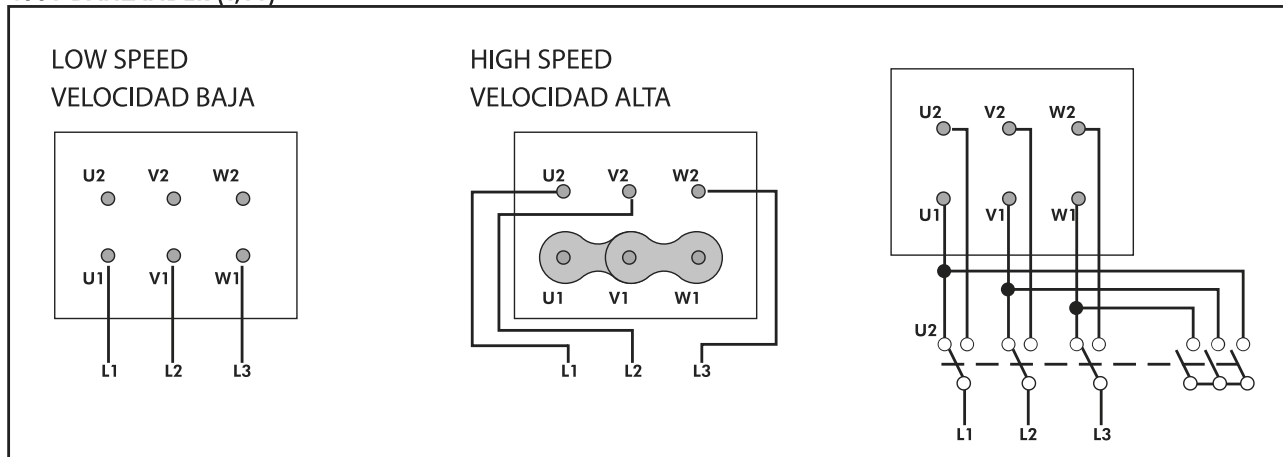

CHARACTERISCTIC CURVE


1 JF 300 T2 UN CONFORT

2 JF 300 T2/T4 UN CONFORT

3 JF 400 T2 UN CONFORT

4 JF 400 T2/T4 UN CONFORT

AIR FLOW - PRESSURE

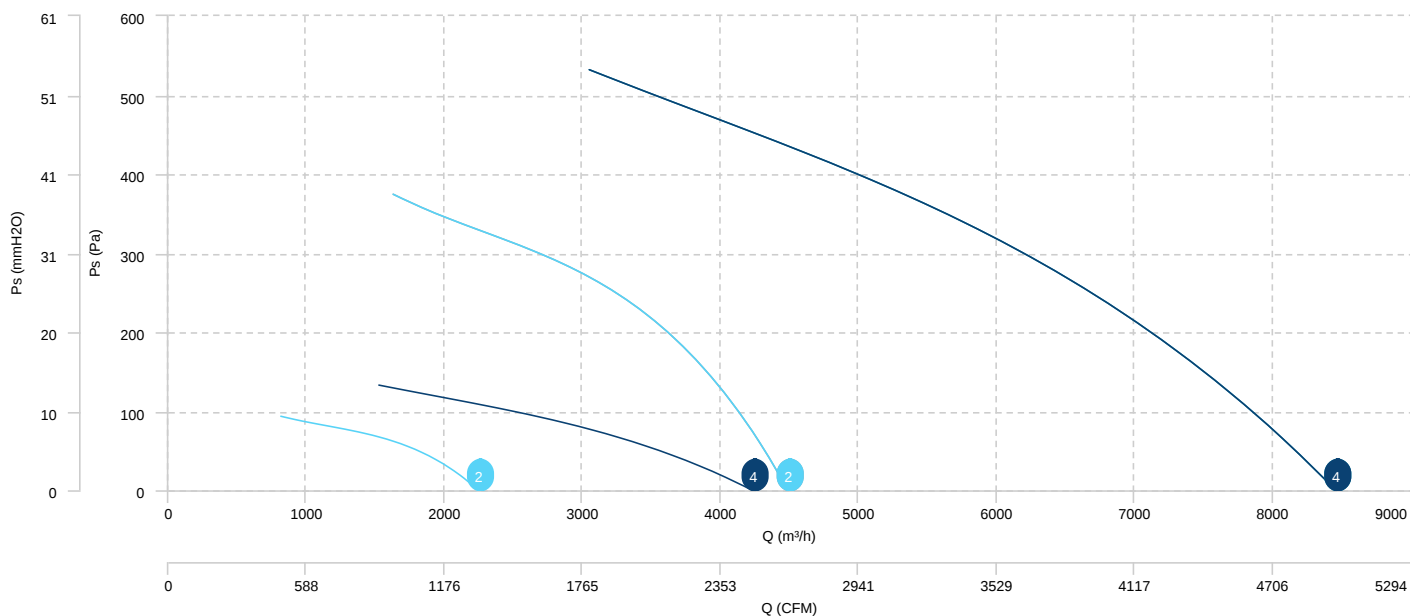

Sound data

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
JF 300 T2 UN CONFORT	Inlet	75	73	71	73	71	71	73	69	81
JF 400 T2 UN CONFORT	Inlet	87	83	82	79	79	79	80	75	91
JF 400 T2/T4 UN CONFORT (1454)	Inlet	87	83	82	79	79	79	80	75	91

Notes:

* To calculate the sound power level at different rpm from those indicated above, use the following formula:

$$Lw\ dB(A)_{rpmA} = Lw\ dB(A)_{rpmB} + 52.5 \cdot \log_{10} \frac{rpmA}{rpmB}$$