

KENTALROOF CONFORT



ROOF FAN WITH HINGED SYSTEM AND ABS COWL

MANUFACTURING FEATURES:

- ABS protection cowl easily removable for access to motor and impeller thanks to the integrated folding system. The ABS cowl is characterized by its toughness, resistance to impacts and is able to withstand extreme ambient temperatures. 100% of the ABS used in the this cowl is recycled.
- The design of the cowl with a **rounded shape** is specific to minimize the risk of water ingress due to rain.
- Equipped with a **hinged system** to open the motor-impeller set. This system allows easy maintenance and cleaning of the set without the need to disassemble the entire structure. The opening is possible in 2 inclinations: approximately 45° and 90°, as required by the intervention.
- Structure in anticorrosive galvanized steel and support frame for adaptation to the roof with anti-bird protection grid.
- High-performance, backward-curved blade (reaction) impellers designed to work without scroll. Self-cleaning system, built in galvanized steel treated with anti-corrosion.
- Standard asynchronous squirrel cage motor with IP-55 protection and Class F insulation. Standard voltages 230V 50Hz for single phase motors, 230/400V 50Hz for three phase motors up to 4kW & 400/690V 50Hz for higher powers and 400V 50Hz for 2 speed motors.

APPLICATIONS

Designed for deck or roof mounting, they are indicated for:

- Smoke extraction.
- Air renewal in all types of buildings and industries.
- Maximum continuous working temperature: transported air 80°C, ambient 60°C to -25°C in three-phase motors.

UNDER REQUEST

- Special voltages.


Accessories




AC



BAD




BTI




BTI+AC
MP



BTI+AC
MP+A
MC



BTI+A
MC



CMP-H
UT



INT



KV
KENTALROOF



SFC



SIL-C /
SIL-CN

Technical data

Single-phase motor / 4 poles

Code	Model	R.P.M.	Rated I. A 230V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
27931471PAM	KENTALROOF CONFORT 315 M4 0,25kW	1410	1,6	0,25	2.590	-	35,50	1
27935471PAM	KENTALROOF CONFORT 355 M4 0,25kW	1410	1,6	0,25	3.610	-	41	1
27940480PAM	KENTALROOF CONFORT 400 M4 0,55kW	1400	3,98	0,55	5.340	-	45	1

Three-phase motor / 2 poles

Code	Model	R.P.M.	Rated I. A		Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
			230V	400V					
27931290PA	KENTALROOF CONFORT 315 T2 1,5kW	2865	5,83	3,14	1,50	5.260	-	36	2

Three-phase motor / 4 poles

Code	Model	R.P.M.	Rated I. A		Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
			230V	400V					
27931471PA	KENTALROOF CONFORT 315 T4 0,25kW	1400	1,38	0,79	0,25	2.590	-	35,50	2
27935471PA	KENTALROOF CONFORT 355 T4 0,25kW	1400	1,38	0,79	0,25	3.610	-	41	2
27940480PA	KENTALROOF CONFORT 400 T4 0,55kW	1440	2,57	1,49	0,55	5.340	-	45	2
27945490PA	KENTALROOF CONFORT 450 T4 1,1kW	1450	4,33	2,49	1,10	7.870	-	85	2
27950491PA	KENTALROOF CONFORT 500 T4 1,5kW	1450	5,67	3,26	1,50	10.430	-	96	2
279564100PA	KENTALROOF CONFORT 560 T4 3kW	1420	10,7	6,17	3,00	15.040	-	104	2
279634132PA	KENTALROOF CONFORT 630 T4 5,5kW	1460	-	10,5	5,50	22.550	-	140	2

Three-phase motor / 6 poles

Code	Model	R.P.M.	Rated I. A		Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
			230V	400V					
27950680PA	KENTALROOF CONFORT 500 T6 0,55kW	900	3,00	1,8	0,55	6.850	-	95	2
27956690PA	KENTALROOF CONFORT 560 T6 1,1kW	925	4,83	2,78	1,10	10.020	-	103	2
279634100PA	KENTALROOF CONFORT 630 T6 1,5kW	940	6,45	3,71	1,50	14.820	-	130	2


2 speed motor / 4/8 poles

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
27931471PA2V	KENTALROOF CONFORT 315 T4/T8 0,25/0,03kW	1370	1,13/0,37	0,25	2.590	-	35,50	3
27935471PA2V	KENTALROOF CONFORT 355 T4/T8 0,25/0,03kW	1370	1,13/0,37	0,25	3.610	-	41	3
27940480PA2V	KENTALROOF CONFORT 400 T4/T8 0,75/0,12kW	1400	2,03/0,68	0,75	5.340	-	45	3
27945490PA2V	KENTALROOF CONFORT 450 T4/T8 1,1/0,18kW	1400	2,67/1,08	1,10	7.870	-	85	3
27950491PA2V	KENTALROOF CONFORT 500 T4/T8 1,5/0,25kW	1400	3,46/1,27	1,50	10.430	-	96	3
279564100PA2 V	KENTALROOF CONFORT 560 T4/T8 3/0,55kW	1430	6,53/2,33	3,00	15.040	-	104	3
279634132PA2 V	KENTALROOF CONFORT 630 T4/T8 5,5/1,1kW	1450	10,73/3,82	5,50	22.550	-	140	3

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

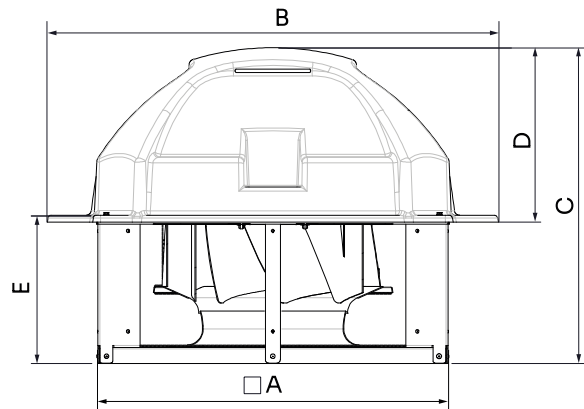


Model	A (int)	B	C	D	E
KENTALROOF CONFORT 315 M4 0, 25kW	592	765	601	365	249
KENTALROOF CONFORT 315 T2 1, 5kW	592	765	601	365	249
KENTALROOF CONFORT 315 T4 0, 25kW	592	765	601	365	249
KENTALROOF CONFORT 315 T4/T8 0, 25/0,03kW	592	765	601	365	249
KENTALROOF CONFORT 355 M4 0, 25kW	662	865.3	624.5	365	272.5
KENTALROOF CONFORT 355 T4 0, 25kW	662	865.3	624.5	365	272.5
KENTALROOF CONFORT 355 T4/T8 0, 25/0,03kW	662	865.3	624.5	365	272.5
KENTALROOF CONFORT 400 M4 0, 55kW	662	865.3	647.5	365	295.5
KENTALROOF CONFORT 400 T4 0, 55kW	662	865.3	647.5	365	295.5
KENTALROOF CONFORT 400 T4/T8 0, 75/0,12kW	662	865.3	647.5	365	295.5
KENTALROOF CONFORT 450 T4 1, 1kW	936	1227	775.8	470	323.8
KENTALROOF CONFORT 450 T4/T8 1, 1/0,18kW	936	1227	775.8	470	323.8
KENTALROOF CONFORT 500 T4 1, 5kW	936	1227	812	470	360
KENTALROOF CONFORT 500 T6 0, 55kW	936	1227	812	470	360
KENTALROOF CONFORT 500 T4/T8 1, 5/0,25kW	936	1227	812	470	360
KENTALROOF CONFORT 560 T4 3kW	936	1227	849.6	470	397.6



Model	A (int)	B	C	D	E
KENTALROOF CONFORT 560 T6 1, 1kW	936	1227	849.6	470	397.6
KENTALROOF CONFORT 560 T4/T8 3/0,55kW	936	1227	849.6	470	397.6
KENTALROOF CONFORT 630 T4 5, 5kW	1035	1339	942.5	520	440.5
KENTALROOF CONFORT 630 T6 1, 5kW	1035	1339	942.5	520	440.5
KENTALROOF CONFORT 630 T4/T8 5, 5/1,1kW	1035	1339	942.5	520	440.5

Wiring diagram

Wiring diagram N° 1

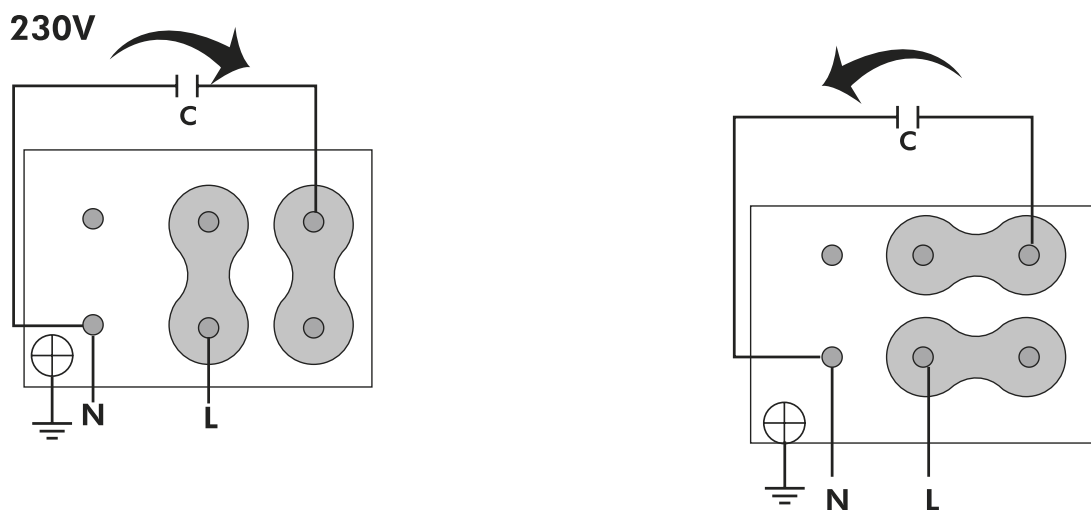


Wiring diagram N° 2

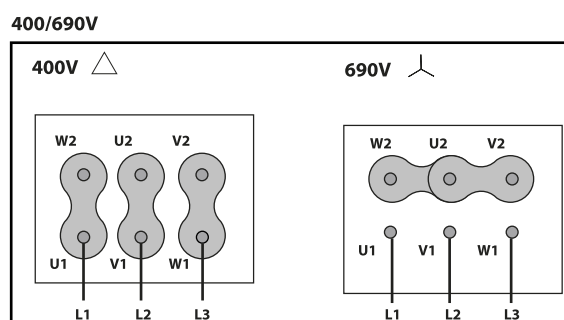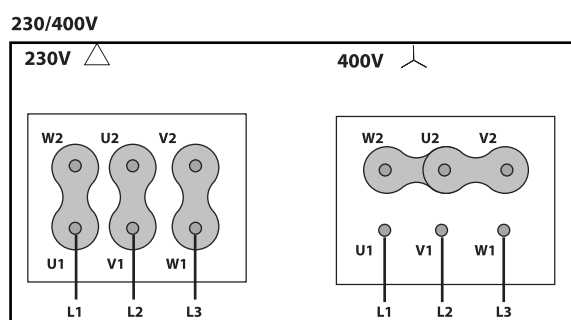

Wiring diagram Nº 3


400V DAHLANDER (Y,YY)

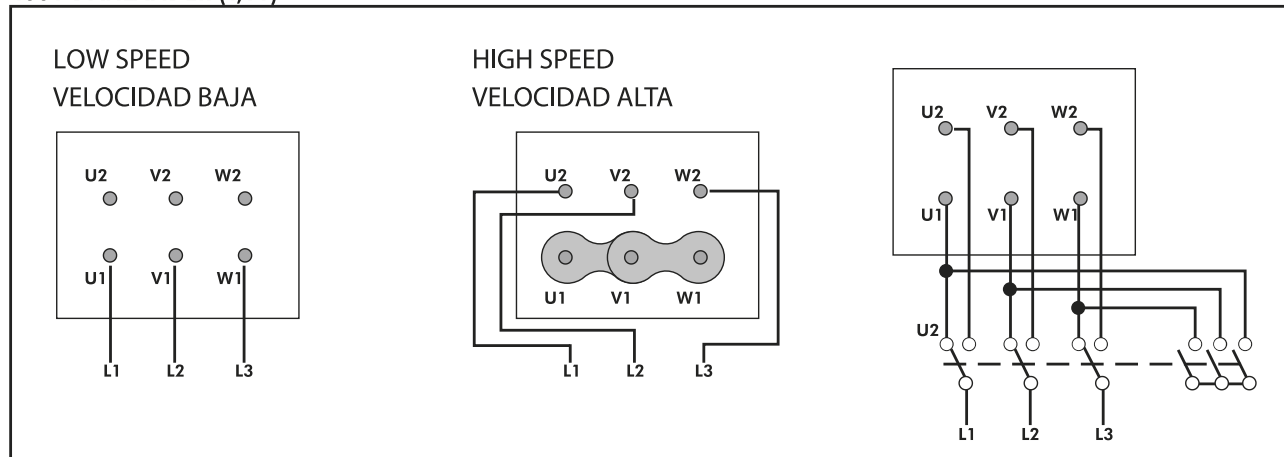


CHARACTERISCTIC CURVE

- | | | | | | |
|---|-------------------------------------|---|-------------------------------------|---|-------------------------------------|
| 1 | KENTALROOF CONFORT
315 M4 0,25kW | 2 | KENTALROOF CONFORT
355 M4 0,25kW | 3 | KENTALROOF CONFORT
400 M4 0,55kW |
|---|-------------------------------------|---|-------------------------------------|---|-------------------------------------|

AIR FLOW - PRESSURE

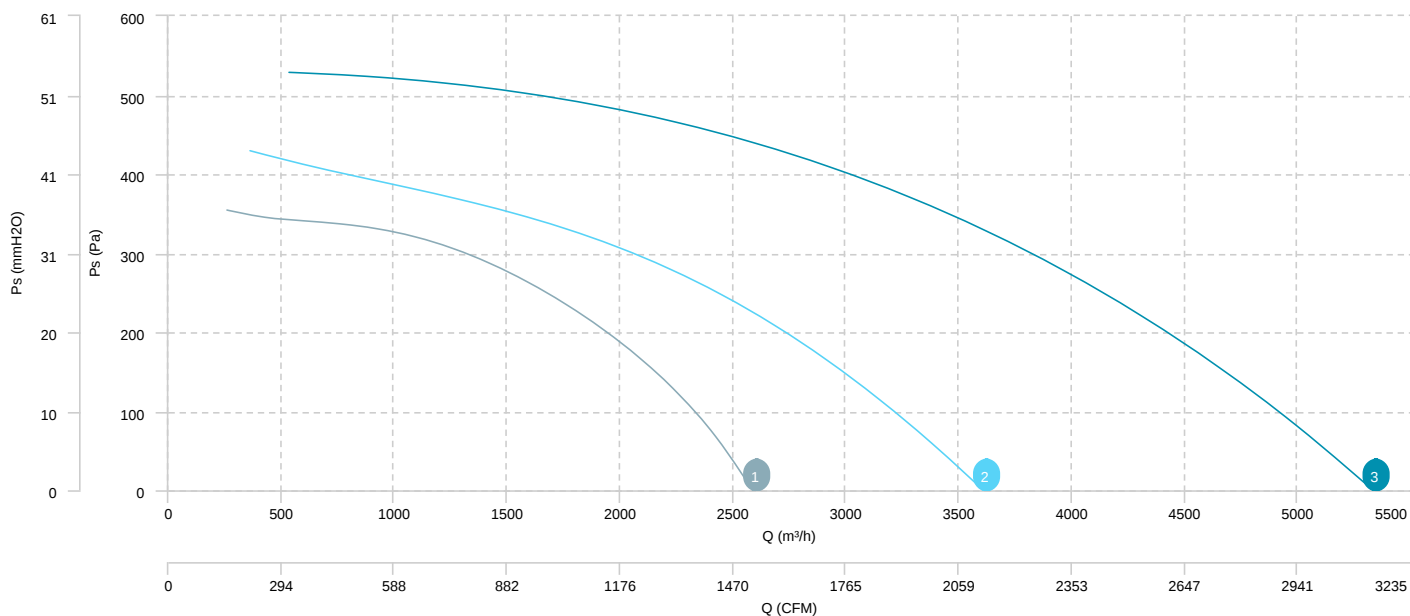


AIR FLOW - ABSORBED POWER

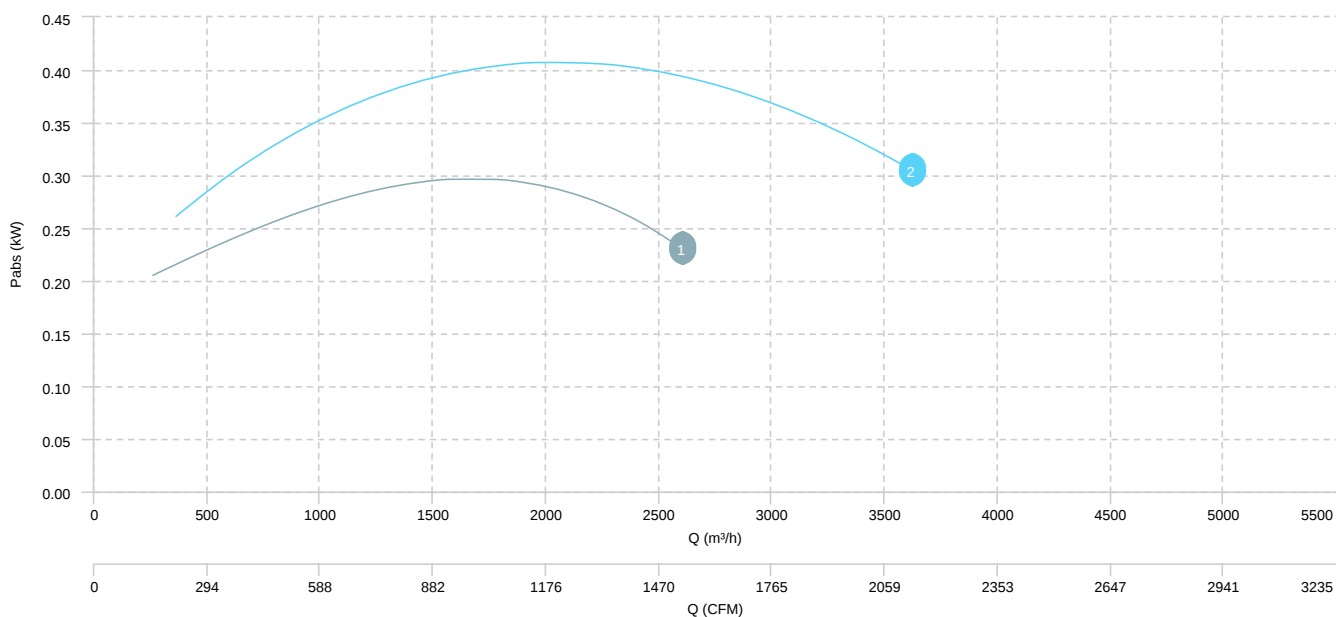


1 KENTALROOF CONFORT
315 T2 1,5kW

AIR FLOW - PRESSURE

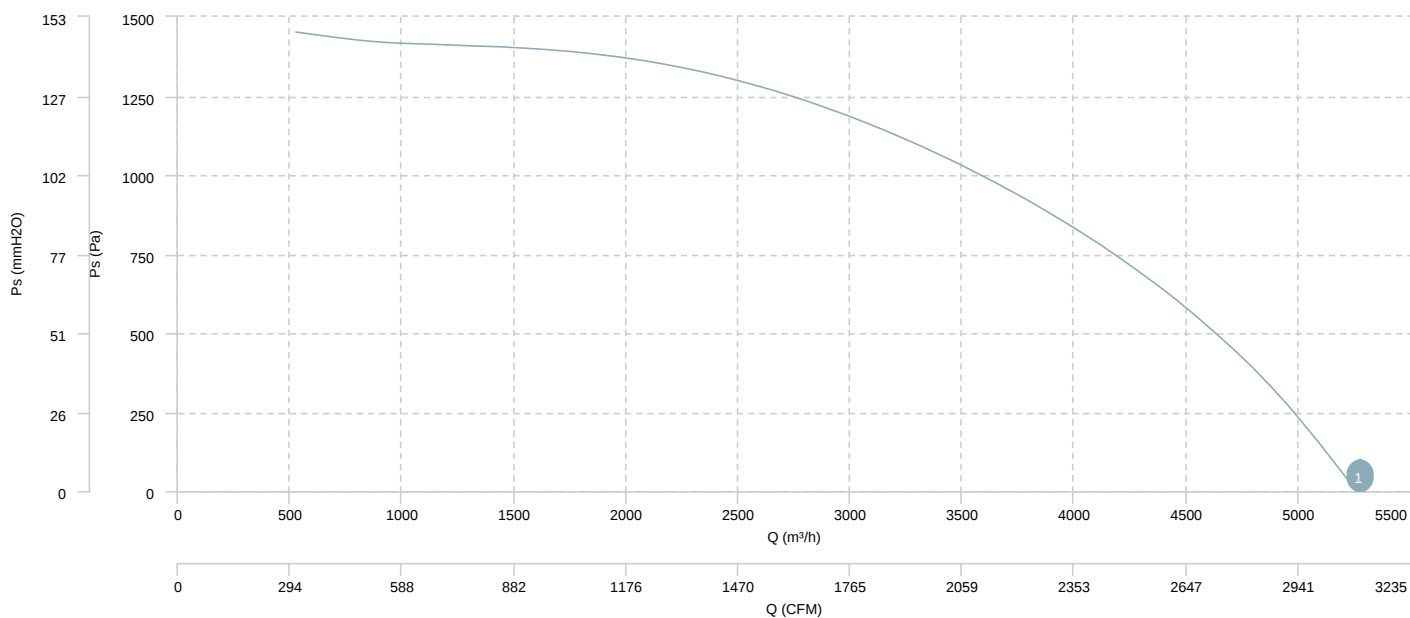


AIR FLOW - ABSORBED POWER

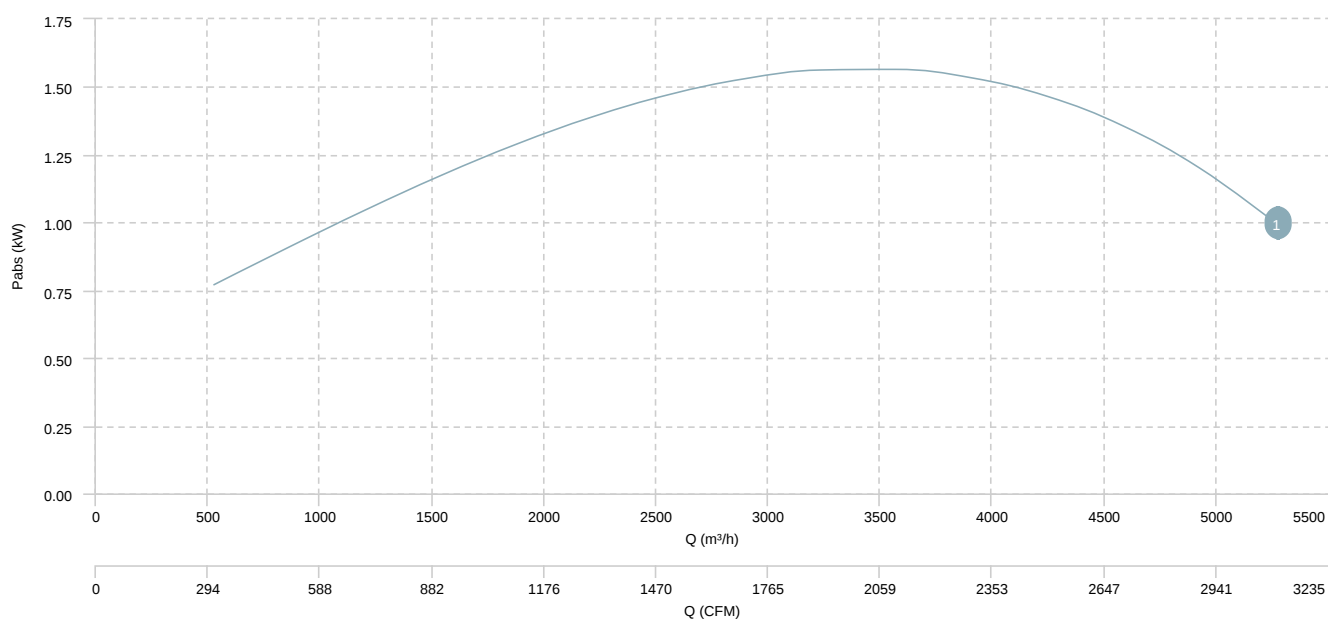


1	KENTALROOF CONFORT 315 T4 0,25kW	2	KENTALROOF CONFORT 355 T4 0,25kW	3	KENTALROOF CONFORT 400 T4 0,55kW	4	KENTALROOF CONFORT 450 T4 1,1kW
5	KENTALROOF CONFORT 500 T4 1,5kW	6	KENTALROOF CONFORT 560 T4 3kW	7	KENTALROOF CONFORT 630 T4 5,5kW		

AIR FLOW - PRESSURE

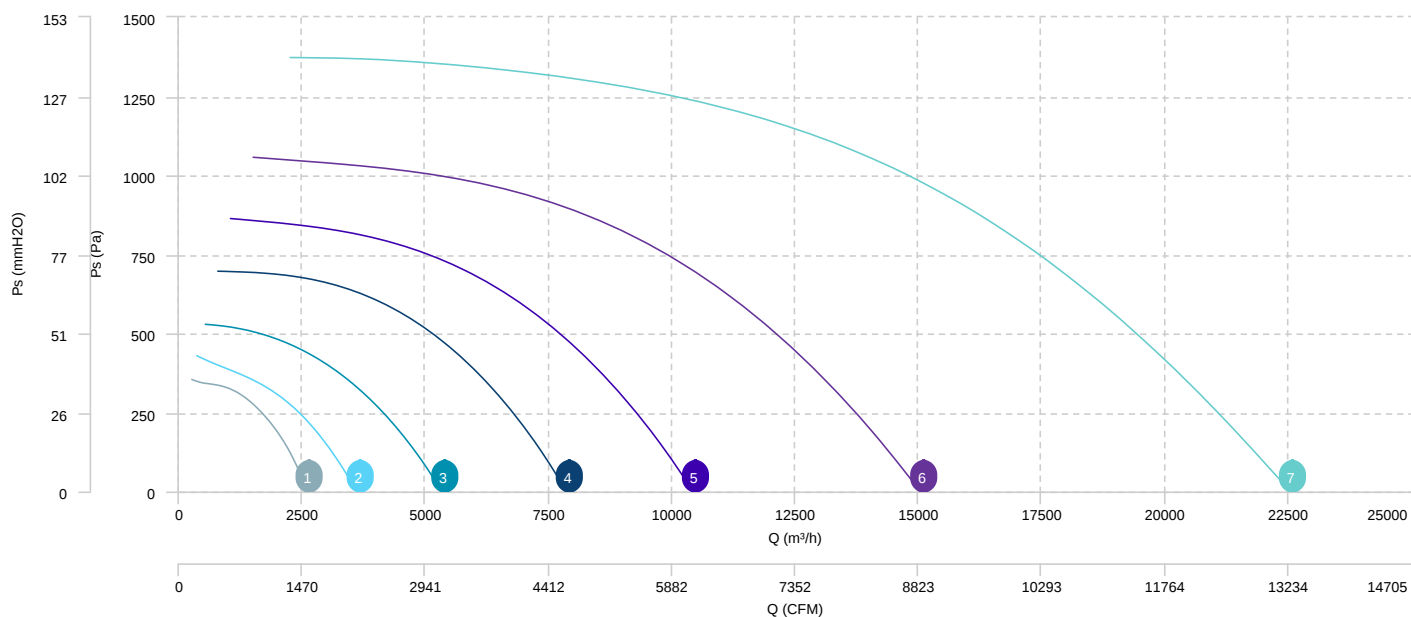


AIR FLOW - ABSORBED POWER

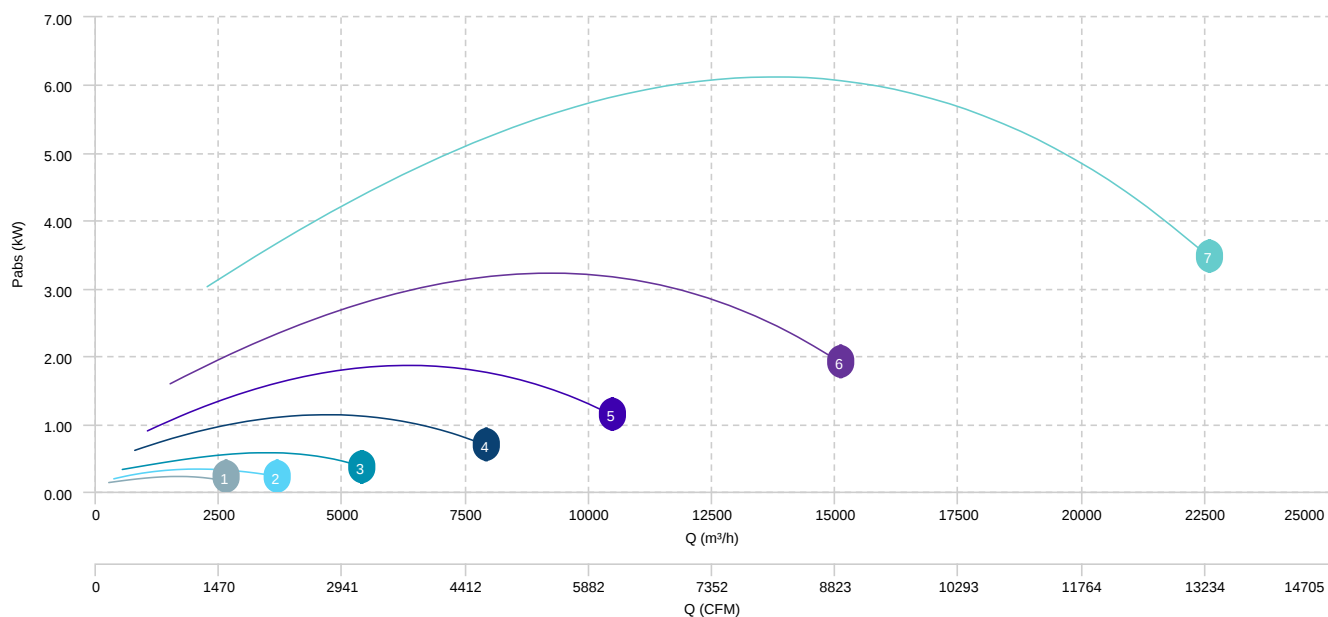


- 1 KENTALROOF CONFORT 500 T6 0,55kW
- 2 KENTALROOF CONFORT 560 T6 1,1kW
- 3 KENTALROOF CONFORT 630 T6 1,5kW

AIR FLOW - PRESSURE

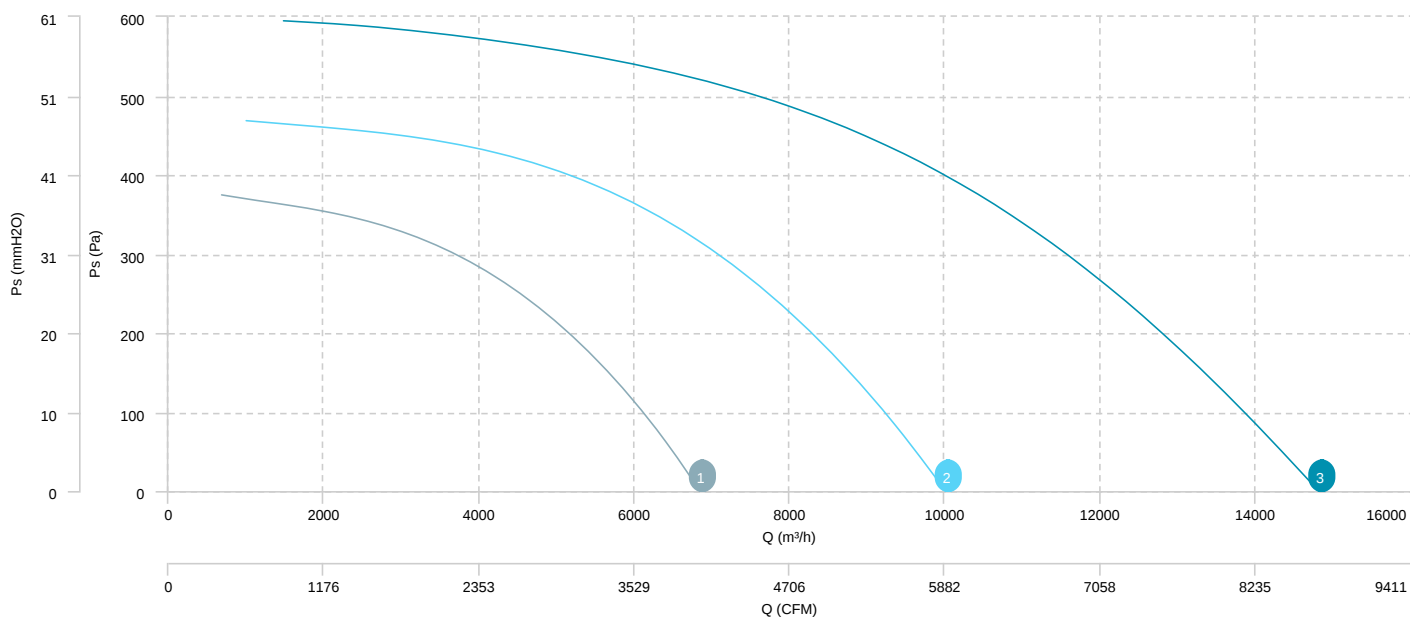


AIR FLOW - ABSORBED POWER

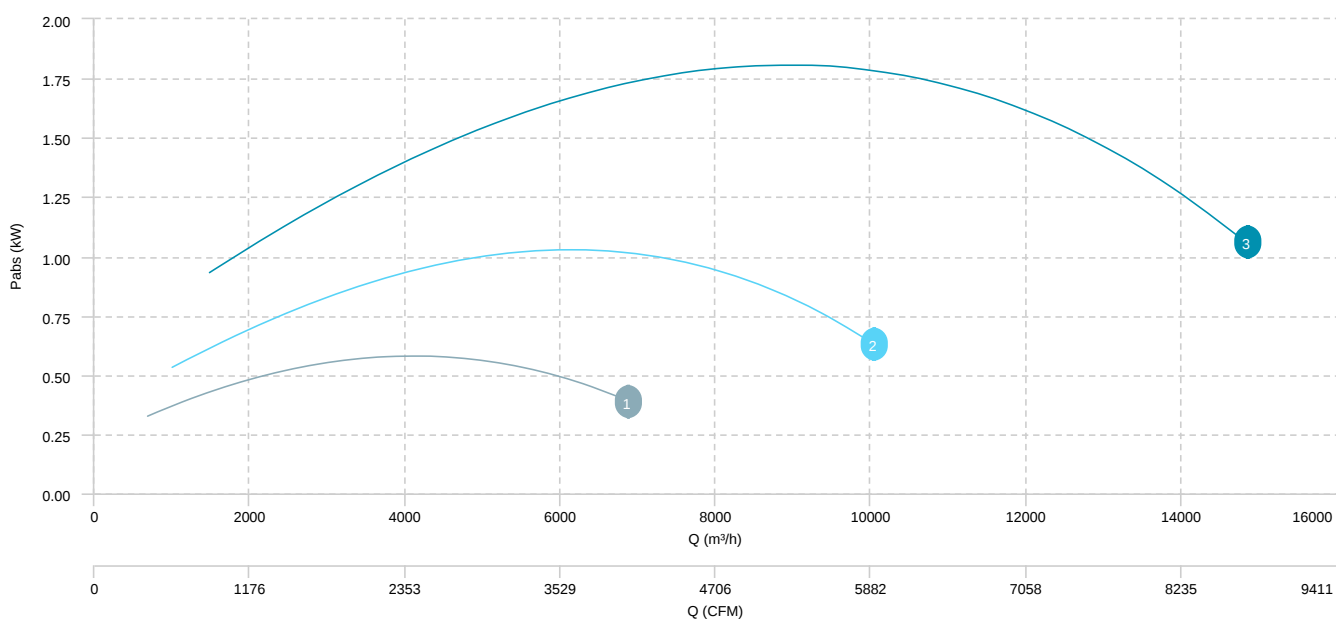


1	KENTALROOF CONFORT 315 T4/T8 0,25/0,03kW	2	KENTALROOF CONFORT 355 T4/T8 0,25/0,03kW	3	KENTALROOF CONFORT 400 T4/T8 0,75/0,12kW	4	KENTALROOF CONFORT 450 T4/T8 1,1/0,18kW
5	KENTALROOF CONFORT 500 T4/T8 1,5/0,25kW	6	KENTALROOF CONFORT 560 T4/T8 3/0,55kW	7	KENTALROOF CONFORT 630 T4/T8 5,5/1,1kW		

AIR FLOW - PRESSURE (4 poles)

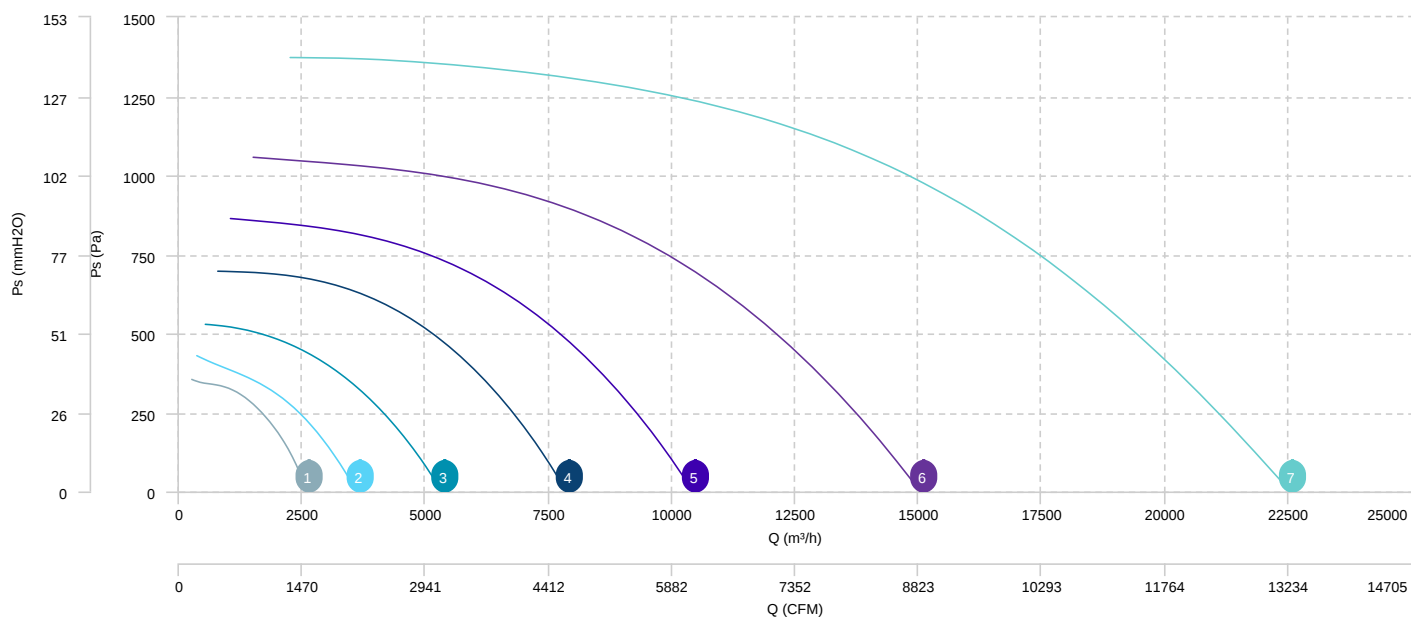

1	KENTALROOF CONFORT 315 T4/T8 0,25/0,03kW	2	KENTALROOF CONFORT 355 T4/T8 0,25/0,03kW	3	KENTALROOF CONFORT 400 T4/T8 0,75/0,12kW	4	KENTALROOF CONFORT 450 T4/T8 1,1/0,18kW
5	KENTALROOF CONFORT 500 T4/T8 1,5/0,25kW	6	KENTALROOF CONFORT 560 T4/T8 3/0,55kW	7	KENTALROOF CONFORT 630 T4/T8 5,5/1,1kW		

AIR FLOW - PRESSURE (8 poles)

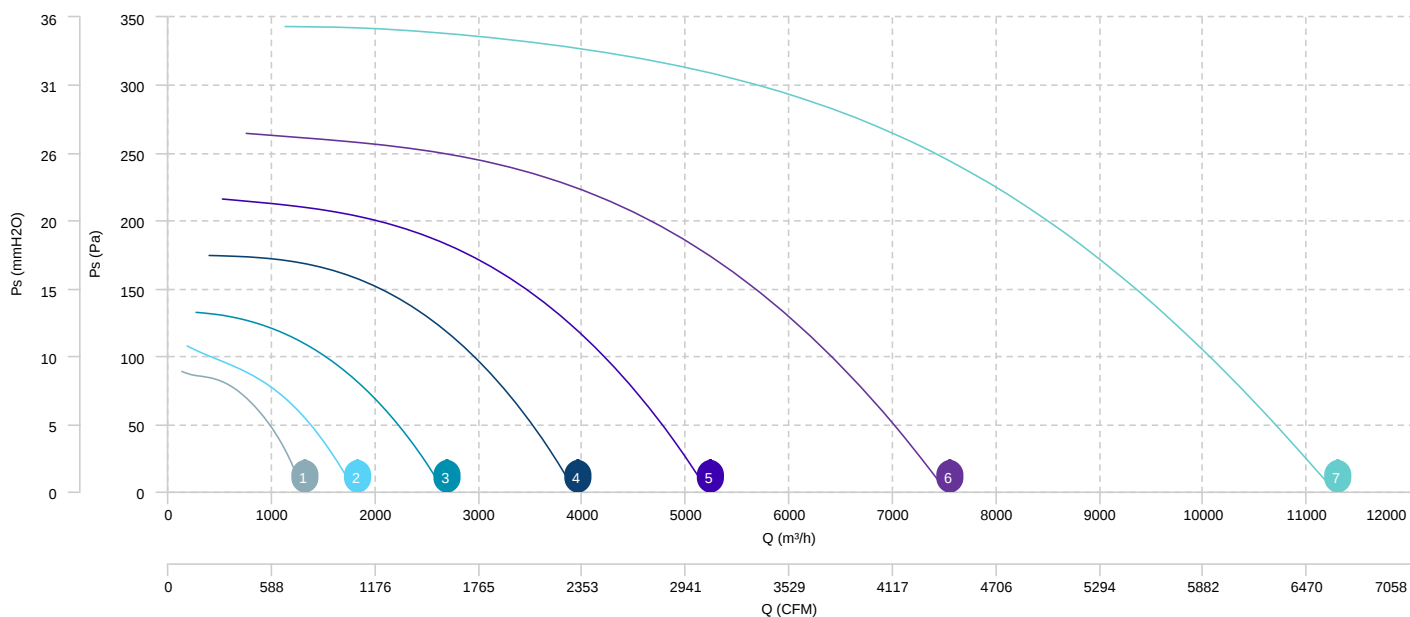

Sound data

Sound / 2 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
KENTALROOF CONFORT 315 T2 1, 5kW ()	Radiated	68	72	82	79	76	79	80	65	85

Sound / 4 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
KENTALROOF CONFORT 315 M4 0,25kW ()	Radiated	52	56	66	63	59	63	63	48	69
KENTALROOF CONFORT 315 T4 0, 25kW ()	Radiated	52	56	66	63	59	63	63	48	69
KENTALROOF CONFORT 355 M4 0,25kW ()	Radiated	56	66	64	64	62	69	56	50	71
KENTALROOF CONFORT 355 T4 0, 25kW ()	Radiated	56	66	64	64	62	69	56	50	71
KENTALROOF CONFORT 400 M4 0,55kW ()	Radiated	59	70	68	67	66	72	59	54	74
KENTALROOF CONFORT 400 T4 0, 55kW ()	Radiated	59	70	68	67	66	72	59	54	74
KENTALROOF CONFORT 450 T4 1, 1kW ()	Radiated	63	71	70	71	70	76	62	56	78
KENTALROOF CONFORT 500 T4 1, 5kW ()	Radiated	67	74	74	75	73	79	66	60	81
KENTALROOF CONFORT 560 T4 3kW ()	Radiated	87	81	81	80	80	75	64	62	81
KENTALROOF CONFORT 630 T4 5, 5kW ()	Radiated	91	85	84	84	83	80	67	65	86

Sound / 6 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
KENTALROOF CONFORT 500 T6 0, 55kW ()	Radiated	58	65	64	65	64	70	57	50	72
KENTALROOF CONFORT 560 T6 1, 1kW ()	Radiated	81	75	75	74	74	70	58	56	75
KENTALROOF CONFORT 630 T6 1, 5kW ()	Radiated	82	75	75	74	74	71	58	56	76

Sound / 4/8 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
KENTALROOF CONFORT 315 T4/T8 0,25/0,03kW (8p -)	Radiated	36	40	50	47	44	47	47	33	53
KENTALROOF CONFORT 315 T4/T8 0,25/0,03kW (4p -)	Radiated	52	56	66	63	59	63	63	48	69
KENTALROOF CONFORT 355 T4/T8 0,25/0,03kW (8p -)	Radiated	40	50	48	48	47	53	40	34	55
KENTALROOF CONFORT 355 T4/T8 0,25/0,03kW (4p -)	Radiated	56	66	64	64	62	69	56	50	71
KENTALROOF CONFORT 400 T4/T8 0,75/0,12kW (8p -)	Radiated	43	54	52	51	50	56	43	38	59
KENTALROOF CONFORT 400 T4/T8 0,75/0,12kW (4p -)	Radiated	59	70	68	67	66	72	59	54	74
KENTALROOF CONFORT 450 T4/T8 1,1/0,18kW (8p -)	Radiated	48	55	55	56	54	60	47	41	62
KENTALROOF CONFORT 450 T4/T8 1,1/0,18kW (4p -)	Radiated	63	71	70	71	70	76	62	56	78
KENTALROOF CONFORT 500 T4/T8 1,5/0,25kW (8p -)	Radiated	51	58	58	59	57	63	50	44	66
KENTALROOF CONFORT 500 T4/T8 1,5/0,25kW (4p -)	Radiated	67	74	74	75	73	79	66	60	81
KENTALROOF CONFORT 560 T4/T8 3/0,55kW (8p -)	Radiated	71	65	65	64	64	60	48	46	66
KENTALROOF CONFORT 560 T4/T8 3/0,55kW (4p -)	Radiated	87	81	81	80	80	75	64	62	81
KENTALROOF CONFORT 630 T4/T8 5,5/1,1kW (8p -)	Radiated	75	69	69	68	67	64	52	49	70
KENTALROOF CONFORT 630 T4/T8 5,5/1,1kW (4p -)	Radiated	91	85	84	84	83	80	67	65	86

erp data

ERP	
Fan type	Unit for non-residential ventilation (LOT 6)
Typology	Unidirectional
Others	None
Type of driver	-

ERP / 2 poles

		Maximum efficiency point data						
Model	Motor power (kW)	Eff.Heat recovery (%)	Max. efficiency (%)	Pabs (kW)	Air Flow (m³/h)	Ps (Pa)	Speed (m/s)	SFP (W/m³/s)
KENTALROOF CONFORT 315 T2 1,5kW ()	1,5	-	68,42	1,56	3.218,58	1.121,74	11.47	1.746,92

ERP / 4 poles

		Maximum efficiency point data						
Model	Motor power (kW)	Eff.Heat recovery (%)	Max. efficiency (%)	Pabs (kW)	Air Flow (m³/h)	Ps (Pa)	Speed (m/s)	SFP (W/m³/s)
KENTALROOF CONFORT 315 M4 0,25kW ()	0,25	-	41,13	0,30	1.596,30	262,70	5.69	668,29
KENTALROOF CONFORT 315 T4 0,25kW ()	0,25	-	55,27	0,22	1.586,47	264,22	5.65	504,29
KENTALROOF CONFORT 355 M4 0,25kW ()	0,25	-	43,83	0,41	2.194,76	283,31	6.16	666,64
KENTALROOF CONFORT 355 T4 0,25kW ()	0,25	-	54,14	0,33	2.202,75	282,28	6.18	540,56
KENTALROOF CONFORT 400 T4 0,55kW ()	0,55	-	62,16	0,57	3.096,61	391,83	6.85	659,86
KENTALROOF CONFORT 450 T4 1,1kW ()	1,10	-	66,59	1,13	4.906,11	525,85	8.57	830,68
KENTALROOF CONFORT 500 T4 1,5kW ()	1,50	-	65,27	1,86	6.464,83	642,69	9.15	1.036,33
KENTALROOF CONFORT 560 T4 3kW ()	3	-	67,58	3,22	9.324,54	798,80	10.52	1.244,36
KENTALROOF CONFORT 630 T4 5,5kW ()	5,50	-	70,94	6,12	14.099,99	1.050,76	12.56	1.561,64

ERP / 6 poles

		Maximum efficiency point data						
Model	Motor power (kW)	Eff.Heat recovery (%)	Max. efficiency (%)	Pabs (kW)	Air Flow (m³/h)	Ps (Pa)	Speed (m/s)	SFP (W/m³/s)
KENTALROOF CONFORT 500 T6 0,55kW ()	0,55	-	57,20	0,58	4.213,44	271,10	5.96	494,79
KENTALROOF CONFORT 560 T6 1,1kW ()	1,1	-	62,31	1,03	6.202,70	353,72	7	596,31
KENTALROOF CONFORT 630 T6 1,5kW ()	1,50	-	65,34	1,81	9.191,60	440,02	8.19	707,07