

SYBILO CONFORT



CENTRIFUGAL JET FAN CONFORT

MANUFACTURING FEATURES

Centrifugal powerful jet fan with low profile.

FAN

- Galvanized steel sheet casing.
- Strong backward impeller with self-cleaning system made of strong galvanized steel sheet.
- External wiring box.
- Inlet protection.
- Feet included.

MOTOR

- Class F insulation, S1 continuous, with bearing balls, IP-55 protection.
- 400V 50Hz 4/8 poles Dalhander three phase motor
- Working temperature between -20°C +60°C.

Accessories



AVT



INT



**INT
400**

Technical data


2 speed motor

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weig ht kg	Connect. diagram
275500186STD	SYBILO 50N CONFORT	-	3/7,74	1,10	5.800	67	83	1
275750186STD	SYBILO 75N CONFORT	-	5,3/1,2	2,20	8.280	68	130	1
275100186STD	SYBILO 100N CONFORT	-	5,3/1,2	2,20	9.200	69	130	1

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

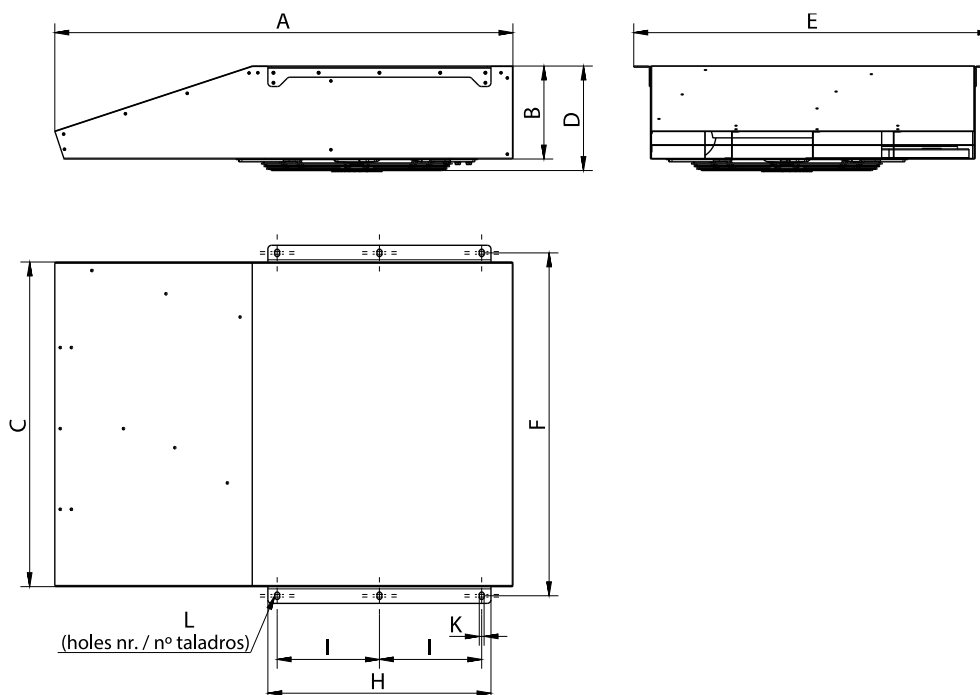


Model	A	B	C	D	E	F	H	I	K
SYBILO 50N CONFORT	1230	250	870	281	963	922	600	275	13
SYBILO 75N CONFORT	1600	300	1000	351,5	1093	1052	800	250	13
SYBILO 100N CONFORT	1600	300	1000	351,5	1093	1052	800	250	13

Model	L	Thrust (N)
SYBILO 50N CONFORT	3	50/13
SYBILO 75N CONFORT	4	75/19
SYBILO 100N CONFORT	4	97/25

Wiring diagram

Wiring diagram Nº 1

400V DAHLANDER (Y,YY)

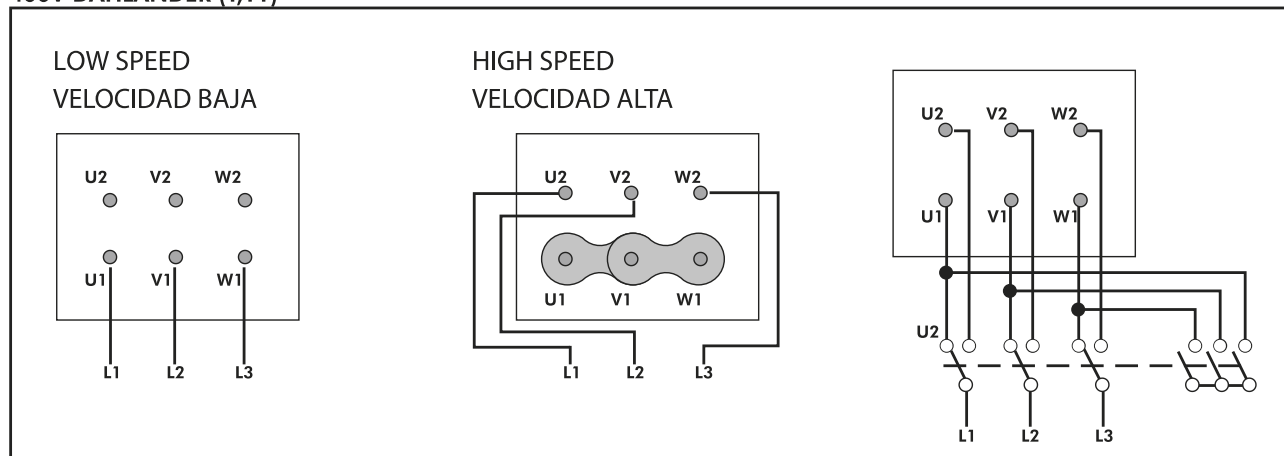


CHARACTERISCTIC CURVE

1 SYBILO 50N CONFORT


2 SYBILO 75N CONFORT

3 SYBILO 100N CONFORT

AIR FLOW - PRESSURE

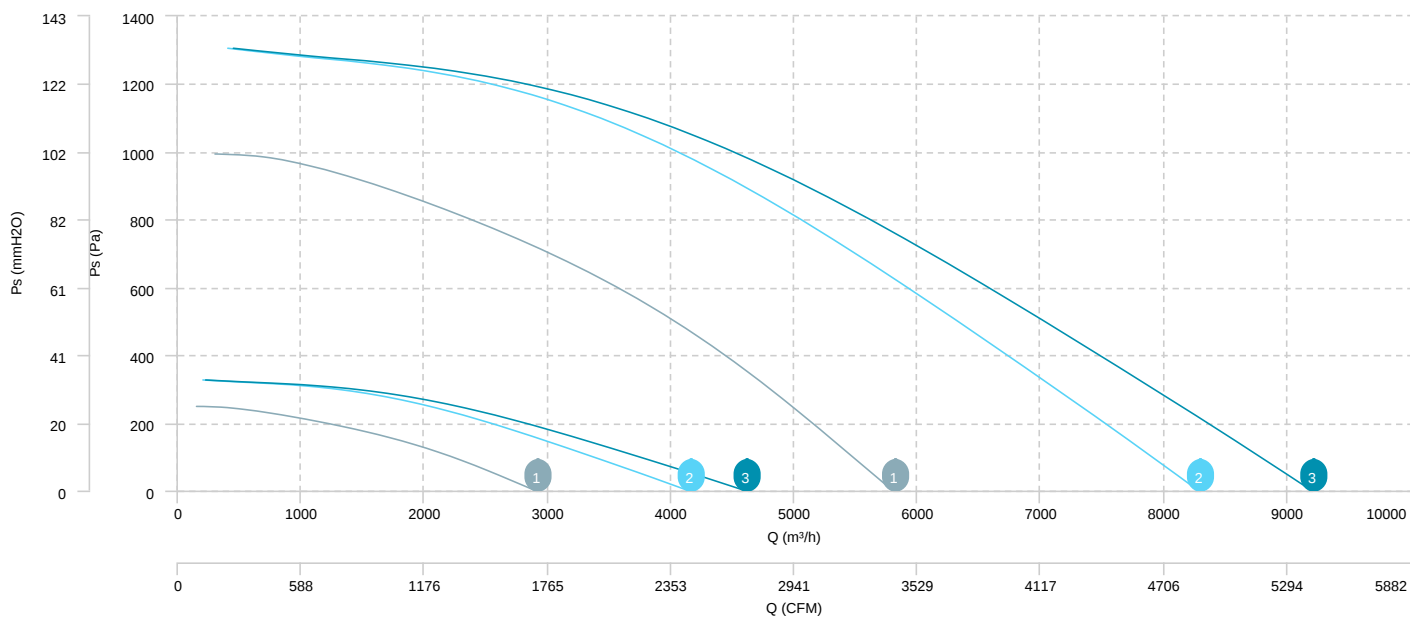

AIR FLOW - ABSORBED POWER

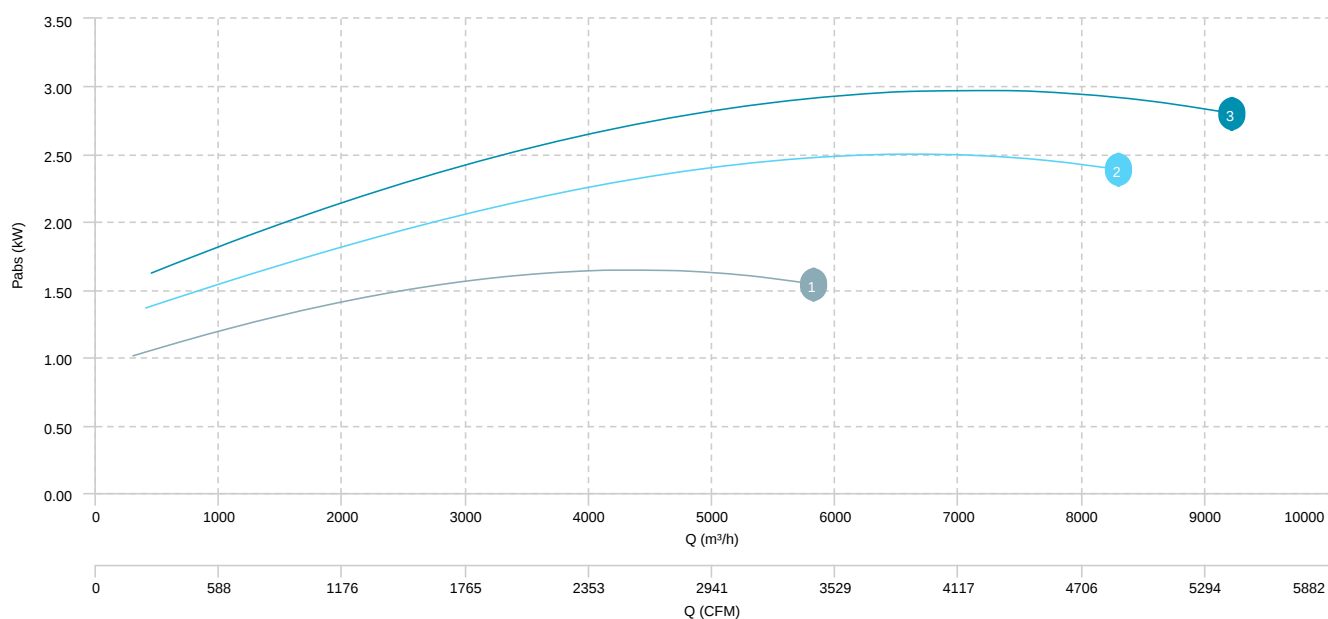

Sound data

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
SYBILO 50N CONFORT (710)	Inlet	46	64	69	72	72	70	65	58	76
SYBILO 75N CONFORT (715)	Inlet	48	68	70	72	74	70	65	58	78
SYBILO 100N CONFORT (715)	Inlet	50	68	72	75	76	72	66	59	80

Notes:

* To calculate the sound power level at different rpm from those indicated above, use the following formula:

$$Lw \text{ dB(A)}_{rpmA} = Lw \text{ dB(A)}_{rpmB} + 52.5 \cdot \log_{10} \frac{rpmA}{rpmB}$$