

GAMA CON PREFILTRO


PARA BOMBAS CENTRÍFUGAS NORMALIZADAS MONOBLOCK



NKP-G 2 POLOS 2900 l/min

MODELO	DNA	DNM	DATOS ELÉCTRICOS					DATOS HIDRÁULICOS																			
			ALIMENT. 50 Hz	P2 NOM.		In A		m³/h	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	102		
				kW	HP	230V	400V	l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700		
NKP-G 40-125/107/1.5/2	65	40	3x230-400V ~	1.5	2	5,8	3,35	H (m)	14.7	14.5	14.3	13.8	13	11.8	10.5	8.6	7										
NKP-G 40-125/120/2.2/2	65	40	3x230-400V ~	2.2	3	8,23	4,75		19	18.7	18.4	17.8	17	15.9	14.6	13	11										
NKP-G 40-125/130/3/2	65	40	3x400 V Δ	3	4	–	5,95		22.8	22.5	22.3	22	21.2	20.2	19	17.4	15.5	13.5									
NKP-G 50-125/115/3/2	65	50	3x400 V Δ	3	4	–	5,95		17				16.5	16	15.5	15	14.5	13.7	13	12	11	10	9				
NKP-G 50-125/125/4/2	65	50	3x400 V Δ	4	5.5	–	8,05		20.5				20	19.5	19.1	18.5	18	17.5	16.5	15.8	14.8	14	12.5	11.5			
NKP-G 50-125/135/5,5/2	65	50	3x400 V Δ	5.5	7.5	–	10.4		24				23.6	23.5	23.2	22.8	22.2	21.5	21	20	19.1	18.5	17.5	16.5	13.4		

MODELO	DNA	DNM	DATOS ELÉCTRICOS				DATOS HIDRÁULICOS																			
			ALIMENT. 50 Hz	P2 NOM.		In A 400V	m³/h	0	36	42	48	54	60	66	72	78	84	90	102	114	120	150	180	210		
				kW	HP		l/min	0	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	3500		
NKP-G 65-125/120-110/4/2	80	65	3x400 V Δ	4	5,5	8,05	H (m)	16	15	14.6	14.2	13.7	13.3	12.8	12.3	12	11.4	10	8.5	8						
NKP-G 65-125/127/5,5/2	80	65	3x400 V Δ	5.5	7,5	10.4		19.5	19	18.9	18.7	18.4	18.1	17.5	17.2	16.9	16.5	15.8	14.5	13	12					
NKP-G 65-125/137/7,5/2	80	65	3x400 V Δ	7.5	10	13.4		23.5	23.1	23	22.8	22.6	22.5	22	21.6	21.1	20.7	20.2	19	17.5	14.8	12				
NKP-G 80-160/147-127/11/2	100	80	3x400 V Δ	11	15	19.4		24										22	21.4	20.4	20	17.4	16.8	12		

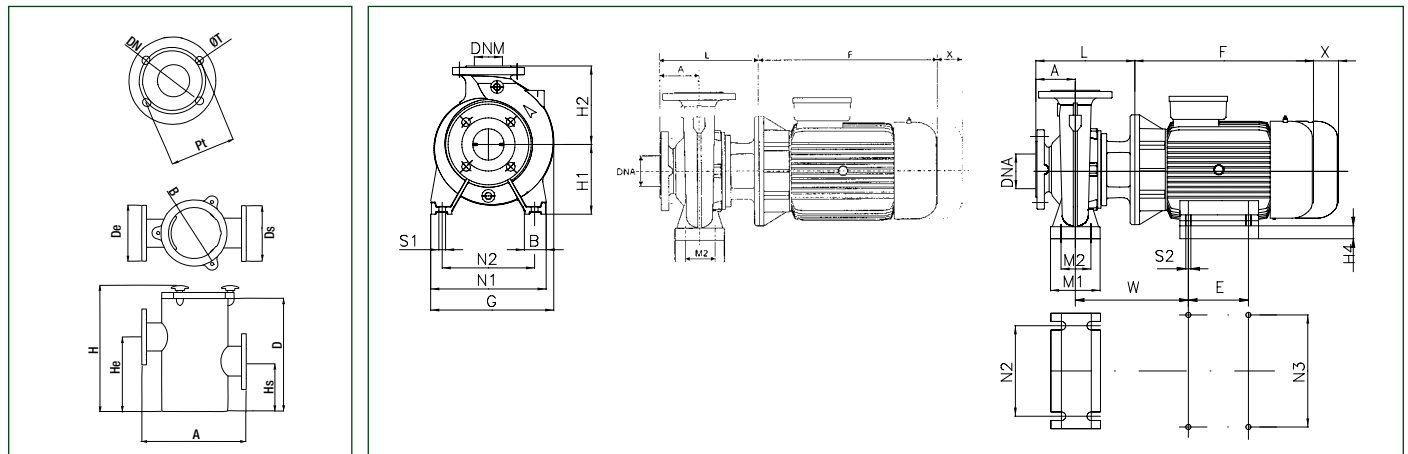

TIPO	DN	Pt	A	B	H	D	De	He	Ds	Hs	øT	N°T	Kg	VOLUMEN litros
PRE FILTRO 65/65	65	145	380	260	415	360	185	250	185	120	18	4	38,5	18
PRE FILTRO 80/80	80	160	380	260	415	360	200	250	200	120	18	4-8	39	18
PRE FILTRO 100/100	100	180	380	260	415	360	200	270	220	155	18	8	40,5	18
PRE FILTRO 125/125	125	210	380	260	415	360	250	270	250	155	18	8	41	18
PRE FILTRO 150/150	150	240	460	340	555	500	285	380	285	190	22	8	71	42
PRE FILTRO 200/200	200	295	460	340	555	500	340	380	340	190	22	8	72	42

MODELO	A	B	E	F min	G	H1	H2	L	M1	M2	N1	N2	N3	S1	S2	W	X	H3	H4	Ø CIERRE	DNA	DNM	DIMENSIONES EMBALAJE			VOL. m³	PESO Kg
																							L/A	L/B	H		
NKP-G40-125/107/1.5/2	80	50	–	247	234	112	140	226	100	70	210	160	–	M10	–	–	100	–	–	28	65	40	620	370	480	0,11	34
NKP-G40-125/120/2.2/2	80	50	–	272	234	112	140	226	100	70	210	160	–	M10	–	–	100	–	–	28	65	40	620	370	480	0,11	36
NKP-G40-125/130/3/2	80	50	–	301	300	112	140	254	100	70	210	160	–	M10	–	–	100	20	–	28	65	40	670	420	540	0,152	47
NKP-G50-125/115/3/2	100	50	–	301	251	132	160	274	100	70	240	190	–	M10	–	–	100	–	–	28	65	50	670	420	540	0,152	48
NKP-G50-125/125/4/2	100	50	–	301	251	132	160	274	100	70	240	190	–	M10	–	–	100	–	–	28	65	50	670	420	540	0,152	42
NKP-G50-125/135/5,5/2	100	50	–	390	300	132	160	313	100	70	240	190	–	M10	–	–	100	20	–	28	65	50	830	430	520	0,186	53
NKP-G65-125/120-110/4/2	100	65	–	301	286	160	180	274	125	95	280	212	–	M10	–	–	100	–	–	28	80	65	670	420	540	0,152	40
NKP-G65-125/127/5,5/2	100	65	–	390	300	160	180	313	125	95	280	212	–	M10	–	–	100	–	–	28	80	65	830	430	520	0,186	55
NKP-G65-125/137/7,5/2	100	65	–	437	300	160	180	313	125	95	280	212	–	M10	–	–	100	–	–	28	80	65	830	430	520	0,186	94
NKP-G80-160/147-127/11/2	125	67	210	505	350	160	225	368	–	–	314	254	–	M12	–	351	140	–	20	28	100	80	1030	530	640	0,349	179