

AAVC ATEX



ATEX HIGH PRESSURE WITH BACKWARD IMPELLER

MANUFACTURING FEATURES:

- Fan made of Fe360 sheet. The fan paint finish is based on a Qualicoat polyester powder coating stoved at 200°C, with an average film thickness of 70 microns. Average heat resistance of coating is 180°C with peaks of 200°C.
- High efficiency simple inlet backward impeller with self-cleaning system made of Fe360 sheet statically and dynamically balanced. Impellers are painted with polyester y primer that resists temperatures up to 300°C.
- ATEX standard asynchronous motor. ATEX certified according to the zone. Squirrel-cage motor with class F insulation. Manufactured with standard voltages: 230/400V 50Hz for three phase motors up to 4kW and 400/690V 50Hz for higher powers.
- Available positions (to be indicated in case of order): LG270, LG0, LG45, LG90, LG135, LG180, LG225, LG315, RD0, RD45, RD90, RD135, RD180, RD225, RD270, RD315.
- The indicated codes correspond to the model in position LG270

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Industrial applications, extraction or injection of air.
- Cooling of machines and parts.
- Clean air transport.
- Exhaust after filters, separators and cyclones.
- Pneumatic transport.
- Working temperature: ambient from -20°C to 40°C, transported air according to the ATEX classification..

UNDER REQUEST

- Fans for 60Hz and special voltages.
- Inox 304 (normal or electropolished finish)
- Inox 316 (normal or electropolished finish)
- Split casing (for big sizes)
- Drain plug.
- Frontal foot

Accessories



AB



AC



AVR



AVS



BA-400



**BADS
ATEX**



**BIDS
ATEX**



EI



FS



**INT
ATEX**



JE 45



RI



SFC

Technical data


Three-phase motor / 2 poles

Code	Model	R.P.M.	Rated I. A 400V	Rated power kW	Max. Airflow m³/h	Sound db (A)**	Weight kg	Connect. diagram
502505019XN	AAVC/N 500 T2 1,5kW ATEX	2850	3,95	1,50	800	57	43	1
502505627XN	AAVC/N 560 T2 2,2kW ATEX	2840	5,4	2,20	870	58	69	1
502506332XN	AAVC/N 630 T2 4kW ATEX	2910	9,2	4,00	1.230	63	133	1
502506334XN	AAVC/N 630 T2 5,5kW ATEX	2910	11,46	5,50	1.630	63	143	1
502507136XN	AAVC/N 710 T2 7,5kW ATEX	2910	14,1	7,50	1.810	67	204	1
502507121XN	AAVC/N 710 T2 11kW ATEX	2940	21,4	11,00	2.530	68	238	1
502508021XN	AAVC/N 800 T2 11kW ATEX	2940	21,4	11,00	1.810	71	254	1
502508024XN	AAVC/N 800 T2 15kW ATEX	2935	27,4	15,00	2.890	72	254	1
502509026XN	AAVC/N 900 T2 18,5kW ATEX	2940	34,4	18,50	2.170	74	348	1
502509028XN	AAVC/N 900 T2 22kW ATEX	2940	39,8	22,00	3.250	74	404	1
502510031XN	AAVC/N 1000 T2 37kW ATEX	2955	66,7	37,00	3.610	78	577	1
502510033XN	AAVC/N 1000 T2 45kW ATEX	2960	78,00	45,00	6.310	79	657	1
507105018XN	AAVC/NR 500 T2 1,1kW ATEX	2830	2,6	1,10	660	56	40	1
507105619XN	AAVC/NR 560 T2 1,5kW ATEX	2850	3,95	1,50	550	58	66	1
507106329XN	AAVC/NR 630 T2 3kW ATEX	2900	7,3	3,00	1.090	61	118	1
507106332XN	AAVC/NR 630 T2 4kW ATEX	2910	9,2	4,00	1.380	61	132	1
507107134XN	AAVC/NR 710 T2 5,5kW ATEX	2910	11,46	5,50	1.450	66	200	1
507107136XN	AAVC/NR 710 T2 7,5kW ATEX	2910	14,1	7,50	1.810	67	200	1
507108036XN	AAVC/NR 800 T2 7,5kW ATEX	2910	14,1	7,50	1.230	70	214	1
507108021XN	AAVC/NR 800 T2 11kW ATEX	2940	21,4	11,00	2.530	71	248	1
507109024XN	AAVC/NR 900 T2 15kW ATEX	2935	27,4	15,00	2.170	73	333	1
507109026XN	AAVC/NR 900 T2 18,5kW ATEX	2940	34,4	18,50	3.250	74	345	1
507110030XN	AAVC/NR 1000 T2 30kW ATEX	2955	56,6	30,00	3.250	77	570	1
507110031XN	AAVC/NR 1000 T2 37kW ATEX	2955	66,7	37,00	4.510	78	570	1

Notes:

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source

Dimensions

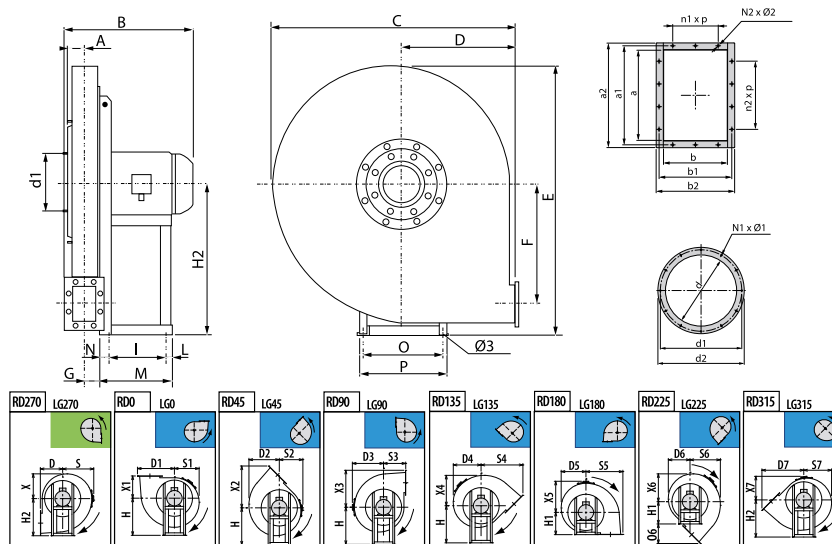

Model	A	B	C	D	D1	D2	D3	D4	D5
AAVC/N 500 T2 1,5kW ATEX	45	391	745	335	430	386	410	370	346
AAVC/N 560 T2 2,2kW ATEX	50	401	835	375	482	438	460	418	391
AAVC/N 630 T2 4kW ATEX	58	463	940	425	539	493	515	472	441
AAVC/N 630 T2 5,5kW ATEX	58	503	940	425	539	493	515	472	441
AAVC/N 710 T2 7,5kW ATEX	67	518	1045	475	605	547	570	522	493
AAVC/N 710 T2 11kW ATEX	67	623	1045	475	605	547	570	522	493
AAVC/N 800 T2 11kW ATEX	73	635	1170	530	678	622	640	592	554
AAVC/N 800 T2 15kW ATEX	73	635	1170	530	678	622	640	592	554
AAVC/N 900 T2 18,5kW ATEX	84	649	1315	600	759	696	715	668	628
AAVC/N 900 T2 22kW ATEX	84	730	1315	600	759	696	715	668	628
AAVC/N 1000 T2 37kW ATEX	90	856	1460	670	846	775	790	735	690
AAVC/N 1000 T2 45kW ATEX	90	898	1460	670	846	775	790	735	690
AAVC/NR 500 T2 1,1kW ATEX	45	344	745	335	430	386	410	370	346
AAVC/NR 560 T2 1,5kW ATEX	50	401	835	375	482	438	460	418	391
AAVC/NR 630 T2 3kW ATEX	58	442	940	425	539	493	515	472	441
AAVC/NR 630 T2 4kW ATEX	58	463	940	425	539	493	515	472	441
AAVC/NR 710 T2 5,5kW ATEX	67	518	1045	475	605	547	570	522	493
AAVC/NR 710 T2 7,5kW ATEX	67	518	1045	475	605	547	570	522	493
AAVC/NR 800 T2 7,5kW ATEX	73	530	1170	530	678	622	640	592	554
AAVC/NR 800 T2 11kW ATEX	73	635	1170	530	678	622	640	592	554

Model	A	B	C	D	D1	D2	D3	D4	D5
AAVC/NR 900 T2 15kW ATEX	84	649	1315	600	759	696	715	668	628
AAVC/NR 900 T2 18,5kW ATEX	84	649	1315	600	759	696	715	668	628
AAVC/NR 1000 T2 30kW ATEX	90	856	1460	670	846	775	790	735	690
AAVC/NR 1000 T2 37kW ATEX	90	856	1460	670	846	775	790	735	690

Model	D6	D7	E	F	G	H	H1	H2	I
AAVC/N 500 T2 1,5kW ATEX	350	541	796	347	42	450	450	450	133
AAVC/N 560 T2 2,2kW ATEX	392	606	891	393	48	500	500	500	133
AAVC/N 630 T2 4kW ATEX	438	681	1001	443	53	560	560	560	197
AAVC/N 630 T2 5,5kW ATEX	438	681	1001	443	53	560	560	560	237
AAVC/N 710 T2 7,5kW ATEX	489	764	1123	497	58	630	630	630	237
AAVC/N 710 T2 11kW ATEX	489	764	1123	497	58	630	630	630	337
AAVC/N 800 T2 11kW ATEX	545	854	1264	560	64	710	710	710	337
AAVC/N 800 T2 15kW ATEX	545	854	1264	560	64	710	710	710	337
AAVC/N 900 T2 18,5kW ATEX	617	961	1428	631	71	800	800	800	337
AAVC/N 900 T2 22kW ATEX	617	961	1428	631	71	800	800	800	357
AAVC/N 1000 T2 37kW ATEX	670	1074	1590	707	80	900	900	900	381
AAVC/N 1000 T2 45kW ATEX	670	1074	1590	707	80	900	900	900	421
AAVC/NR 500 T2 1,1kW ATEX	350	541	796	347	42	450	450	450	121
AAVC/NR 560 T2 1,5kW ATEX	392	606	891	393	48	500	500	500	133
AAVC/NR 630 T2 3kW ATEX	438	681	1001	443	53	560	560	560	197
AAVC/NR 630 T2 4kW ATEX	438	681	1001	443	53	560	560	560	197
AAVC/NR 710 T2 5,5kW ATEX	489	764	1123	497	58	630	630	630	237
AAVC/NR 710 T2 7,5kW ATEX	489	764	1123	497	58	630	630	630	237
AAVC/NR 800 T2 7,5kW ATEX	545	854	1264	560	64	710	710	710	237
AAVC/NR 800 T2 11kW ATEX	545	854	1264	560	64	710	710	710	337
AAVC/NR 900 T2 15kW ATEX	617	961	1428	631	71	800	800	800	337
AAVC/NR 900 T2 18,5kW ATEX	617	961	1428	631	71	800	800	800	337
AAVC/NR 1000 T2 30kW ATEX	670	1074	1590	707	80	900	900	900	381
AAVC/NR 1000 T2 37kW ATEX	670	1074	1590	707	80	900	900	900	381

Model	L	M	N	N1 x Ø1	N2 x Ø2	O	O6	P	S
AAVC/N 500 T2 1,5kW ATEX	58	246	55	Nº8 M6x20	4x10	234	206	260	410
AAVC/N 560 T2 2,2kW ATEX	58	246	55	Nº8 M6x20	4x10	234	231	260	460
AAVC/N 630 T2 4kW ATEX	49	276	30	Nº8 M6x20	6x10	289	256	324	515
AAVC/N 630 T2 5,5kW ATEX	59	336	40	Nº8 M6x20	6x10	337	256	372	515
AAVC/N 710 T2 7,5kW ATEX	59	336	40	Nº8 M6x20	6x12	337	289	372	570

Model	L	M	N	N1 x Ø1	N2 x Ø2	O	O6	P	S
AAVC/N 710 T2 11kW ATEX	49	436	50	Nº8 M6x20	6x12	395	289	440	570
AAVC/N 800 T2 11kW ATEX	49	436	50	Nº8 M6x20	6x12	395	324	440	640
AAVC/N 800 T2 15kW ATEX	49	436	50	Nº8 M6x20	6x12	395	324	440	640
AAVC/N 900 T2 18,5kW ATEX	49	436	50	Nº8 M8x25	6x12	395	361	440	715
AAVC/N 900 T2 22kW ATEX	33	460	70	Nº8 M8x25	6x12	434	361	488	715
AAVC/N 1000 T2 37kW ATEX	39	500	80	Nº8 M8x25	8x12	506	174	568	790
AAVC/N 1000 T2 45kW ATEX	39	540	80	Nº8 M8x25	8x12	556	174	616	790
AAVC/NR 500 T2 1,1kW ATEX	45	211	45	Nº8 M6x20	4x10	203	206	225	410
AAVC/NR 560 T2 1,5kW ATEX	58	246	55	Nº8 M6x20	4x10	234	231	260	460
AAVC/NR 630 T2 3kW ATEX	49	276	30	Nº8 M6x20	6x10	289	256	324	515
AAVC/NR 630 T2 4kW ATEX	49	276	30	Nº8 M6x20	6x10	289	256	324	515
AAVC/NR 710 T2 5,5kW ATEX	59	336	40	Nº8 M6x20	6x12	337	289	372	570
AAVC/NR 710 T2 7,5kW ATEX	59	336	40	Nº8 M6x20	6x12	337	289	372	570
AAVC/NR 800 T2 7,5kW ATEX	59	336	40	Nº8 M6x20	6x12	337	324	372	640
AAVC/NR 800 T2 11kW ATEX	49	436	50	Nº8 M6x20	6x12	395	324	440	640
AAVC/NR 900 T2 15kW ATEX	49	436	50	Nº8 M8x25	6x12	395	361	440	715
AAVC/NR 900 T2 18,5kW ATEX	49	436	50	Nº8 M8x25	6x12	395	361	440	715
AAVC/NR 1000 T2 30kW ATEX	39	500	80	Nº8 M8x25	8x12	506	174	568	790
AAVC/NR 1000 T2 37kW ATEX	39	500	80	Nº8 M8x25	8x12	506	174	568	790

Model	S1	S2	S3	S4	S5	S6	S7	X	X1
AAVC/N 500 T2 1,5kW ATEX	346	350	335	541	430	386	370	335	335
AAVC/N 560 T2 2,2kW ATEX	391	392	375	606	482	438	418	391	375
AAVC/N 630 T2 4kW ATEX	441	438	425	681	539	493	472	441	425
AAVC/N 630 T2 5,5kW ATEX	441	438	425	681	539	493	472	441	425
AAVC/N 710 T2 7,5kW ATEX	493	489	475	764	605	547	522	493	475
AAVC/N 710 T2 11kW ATEX	493	489	475	764	605	547	522	493	475

Model	S1	S2	S3	S4	S5	S6	S7	X	X1
AAVC/N 800 T2 11kW ATEX	554	545	530	854	678	622	592	554	530
AAVC/N 800 T2 15kW ATEX	554	545	530	854	678	622	592	554	530
AAVC/N 900 T2 18,5kW ATEX	628	617	600	961	759	696	668	628	600
AAVC/N 900 T2 22kW ATEX	628	617	600	961	759	696	668	628	600
AAVC/N 1000 T2 37kW ATEX	690	670	670	1074	846	775	735	690	670
AAVC/N 1000 T2 45kW ATEX	690	670	670	1074	846	775	735	690	670
AAVC/NR 500 T2 1,1kW ATEX	346	350	335	541	430	386	370	346	335
AAVC/NR 560 T2 1,5kW ATEX	391	392	375	606	482	438	418	391	375
AAVC/NR 630 T2 3kW ATEX	441	438	425	681	539	493	472	441	425
AAVC/NR 630 T2 4kW ATEX	441	438	425	681	539	493	472	441	425
AAVC/NR 710 T2 5,5kW ATEX	493	489	475	764	605	547	522	493	475
AAVC/NR 710 T2 7,5kW ATEX	493	489	475	764	605	547	522	493	475
AAVC/NR 800 T2 7,5kW ATEX	554	545	530	854	678	622	592	554	530
AAVC/NR 800 T2 11kW ATEX	554	545	530	854	678	622	592	554	530
AAVC/NR 900 T2 15kW ATEX	628	617	600	961	759	696	668	628	600
AAVC/NR 900 T2 18,5kW ATEX	628	617	600	961	759	696	668	628	600
AAVC/NR 1000 T2 30kW ATEX	690	670	670	1074	846	775	735	690	670
AAVC/NR 1000 T2 37kW ATEX	690	670	670	1074	846	775	735	690	670

Model	X2	X3	X4	X5	X6	X7	a	a1	a2
AAVC/N 500 T2 1,5kW ATEX	541	430	386	410	370	350	105	139	165
AAVC/N 560 T2 2,2kW ATEX	606	482	438	460	418	392	117	151	177
AAVC/N 630 T2 4kW ATEX	681	539	493	515	472	438	131	165	191
AAVC/N 630 T2 5,5kW ATEX	681	539	493	515	472	438	131	165	191
AAVC/N 710 T2 7,5kW ATEX	764	605	547	570	522	489	146	182	216
AAVC/N 710 T2 11kW ATEX	764	605	547	570	522	489	146	182	216
AAVC/N 800 T2 11kW ATEX	854	678	622	640	592	545	166	200	236
AAVC/N 800 T2 15kW ATEX	854	678	622	640	592	545	166	200	236
AAVC/N 900 T2 18,5kW ATEX	961	759	696	715	668	617	185	219	255
AAVC/N 900 T2 22kW ATEX	961	759	696	715	668	617	185	219	255
AAVC/N 1000 T2 37kW ATEX	1074	846	775	790	735	670	207	241	277
AAVC/N 1000 T2 45kW ATEX	1074	846	775	790	735	670	207	241	277
AAVC/NR 500 T2 1,1kW ATEX	541	430	386	410	370	350	105	139	165
AAVC/NR 560 T2 1,5kW ATEX	606	482	438	460	418	392	117	151	177
AAVC/NR 630 T2 3kW ATEX	681	539	493	515	472	438	131	165	191
AAVC/NR 630 T2 4kW ATEX	681	539	493	515	472	438	131	165	191
AAVC/NR 710 T2 5,5kW ATEX	764	605	547	570	522	489	146	182	216
AAVC/NR 710 T2 7,5kW ATEX	764	605	547	570	522	489	146	182	216
AAVC/NR 800 T2 7,5kW ATEX	854	678	622	640	592	545	166	200	236
AAVC/NR 800 T2 11kW ATEX	854	678	622	640	592	545	166	200	236


Model	X2	X3	X4	X5	X6	X7	a	a1	a2
AAVC/NR 900 T2 15kW ATEX	961	759	696	715	668	617	185	219	255
AAVC/NR 900 T2 18,5kW ATEX	961	759	696	715	668	617	185	219	255
AAVC/NR 1000 T2 30kW ATEX	1074	846	775	790	735	670	207	241	277
AAVC/NR 1000 T2 37kW ATEX	1074	846	775	790	735	670	207	241	277

Model	b	b1	b2	d	d1	d2	n1 x p	n2 x p	Ø3
AAVC/N 500 T2 1,5kW ATEX	76	110	136	145	182	215	-	-	10
AAVC/N 560 T2 2,2kW ATEX	85	119	145	165	200	235	-	-	10
AAVC/N 630 T2 4kW ATEX	95	129	155	185	219	250	-	1x100	12
AAVC/N 630 T2 5,5kW ATEX	95	129	155	185	219	250	-	1x100	12
AAVC/N 710 T2 7,5kW ATEX	105	139	175	205	241	275	-	1x112	12
AAVC/N 710 T2 11kW ATEX	105	139	175	205	241	275	-	1x112	14
AAVC/N 800 T2 11kW ATEX	117	151	187	228	265	298	-	1x112	14
AAVC/N 800 T2 15kW ATEX	117	151	187	228	265	298	-	1x112	14
AAVC/N 900 T2 18,5kW ATEX	131	165	201	255	292	325	-	1x112	14
AAVC/N 900 T2 22kW ATEX	131	165	201	255	292	325	-	1x112	17
AAVC/N 1000 T2 37kW ATEX	148	182	218	285	332	365	1x112	1x112	19
AAVC/N 1000 T2 45kW ATEX	148	182	218	285	332	365	1x112	1x112	19
AAVC/NR 500 T2 1,1kW ATEX	76	110	136	145	182	215	-	-	10
AAVC/NR 560 T2 1,5kW ATEX	85	119	145	165	200	235	-	-	10
AAVC/NR 630 T2 3kW ATEX	95	129	155	185	219	250	-	1x100	12
AAVC/NR 630 T2 4kW ATEX	95	129	155	185	219	250	-	1x100	12
AAVC/NR 710 T2 5,5kW ATEX	105	139	175	205	241	275	-	1x112	12
AAVC/NR 710 T2 7,5kW ATEX	105	139	175	205	241	275	-	1x112	12
AAVC/NR 800 T2 7,5kW ATEX	117	151	187	228	265	298	-	1x112	12
AAVC/NR 800 T2 11kW ATEX	117	151	187	228	265	298	-	1x112	14
AAVC/NR 900 T2 15kW ATEX	131	165	201	255	292	325	-	1x112	14
AAVC/NR 900 T2 18,5kW ATEX	131	165	201	255	292	325	-	1x112	14
AAVC/NR 1000 T2 30kW ATEX	148	182	218	285	332	365	1x112	1x112	19
AAVC/NR 1000 T2 37kW ATEX	148	182	218	285	332	365	1x112	1x112	19


Wiring diagram

Wiring diagram Nº 1

230/400V

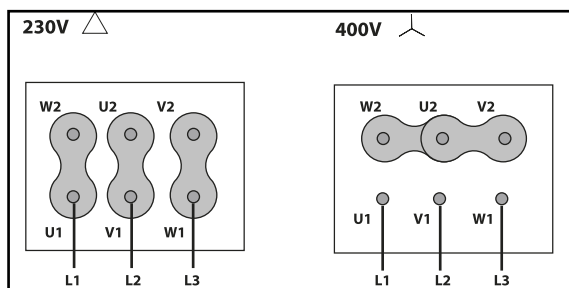


400/690V

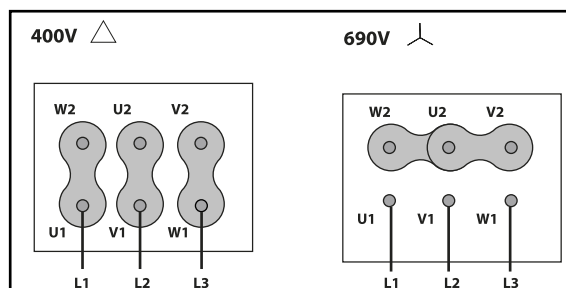


CHARACTERISCTIC CURVE

1	AAVC/N 500 T2 1,5kW ATEX	2	AAVC/N 560 T2 2,2kW ATEX	3	AAVC/N 630 T2 4kW ATEX	4	AAVC/N 630 T2 5,5kW ATEX
5	AAVC/N 710 T2 7,5kW ATEX	6	AAVC/N 710 T2 11kW ATEX	7	AAVC/N 800 T2 11kW ATEX	8	AAVC/N 800 T2 15kW ATEX
9	AAVC/N 900 T2 18,5kW ATEX	10	AAVC/N 900 T2 22kW ATEX	11	AAVC/N 1000 T2 37kW ATEX	12	AAVC/N 1000 T2 45kW ATEX

AIR FLOW - PRESSURE

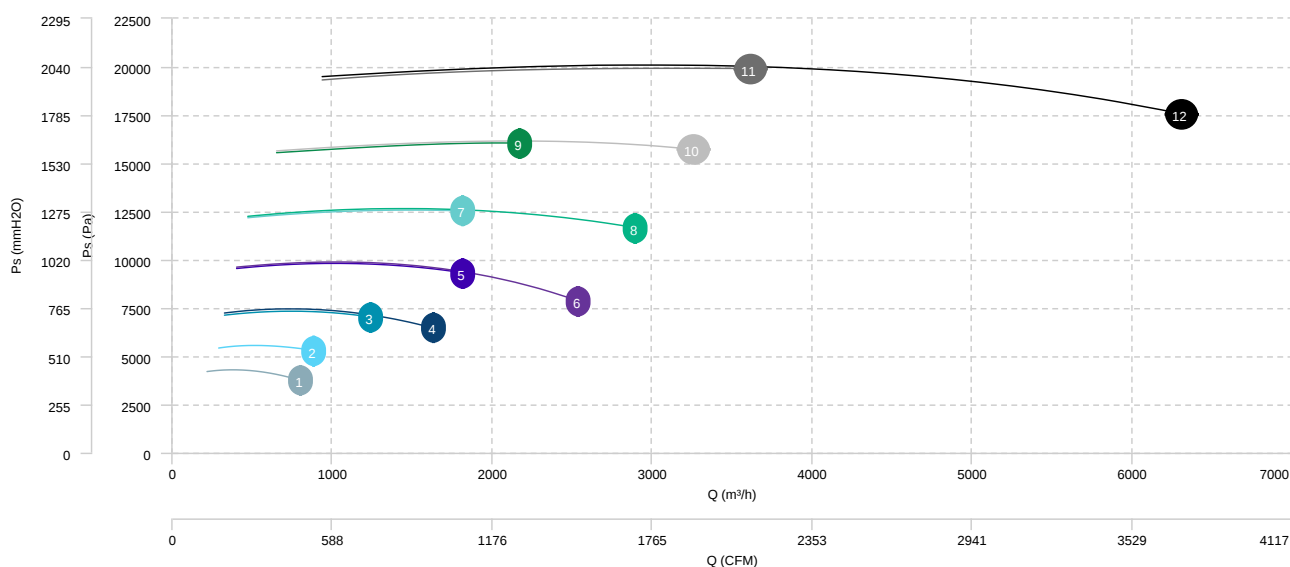


AIR FLOW - ABSORBED POWER

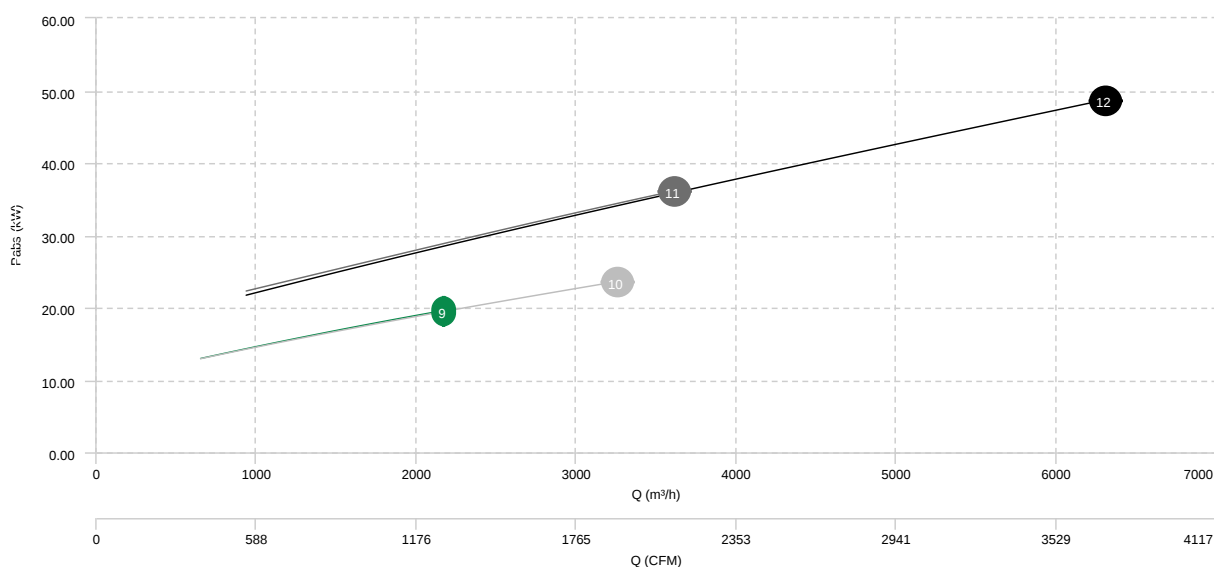


1	AAVC/NR 500 T2 1,1kW ATEX	2	AAVC/NR 560 T2 1,5kW ATEX	3	AAVC/NR 630 T2 3kW ATEX	4	AAVC/NR 630 T2 4kW ATEX
5	AAVC/NR 710 T2 5,5kW ATEX	6	AAVC/NR 710 T2 7,5kW ATEX	7	AAVC/NR 800 T2 7,5kW ATEX	8	AAVC/NR 800 T2 11kW ATEX
9	AAVC/NR 900 T2 15kW ATEX	10	AAVC/NR 900 T2 18,5kW ATEX	11	AAVC/NR 1000 T2 30kW ATEX	12	AAVC/NR 1000 T2 37kW ATEX

AIR FLOW - PRESSURE

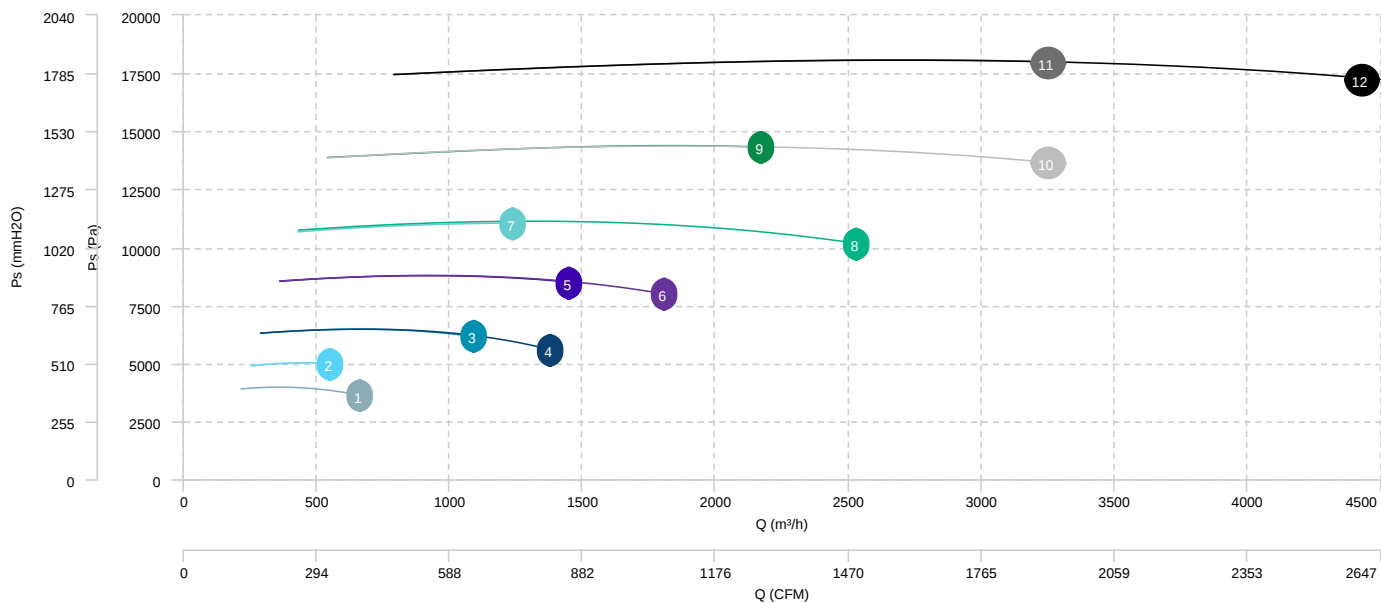

AIR FLOW - ABSORBED POWER

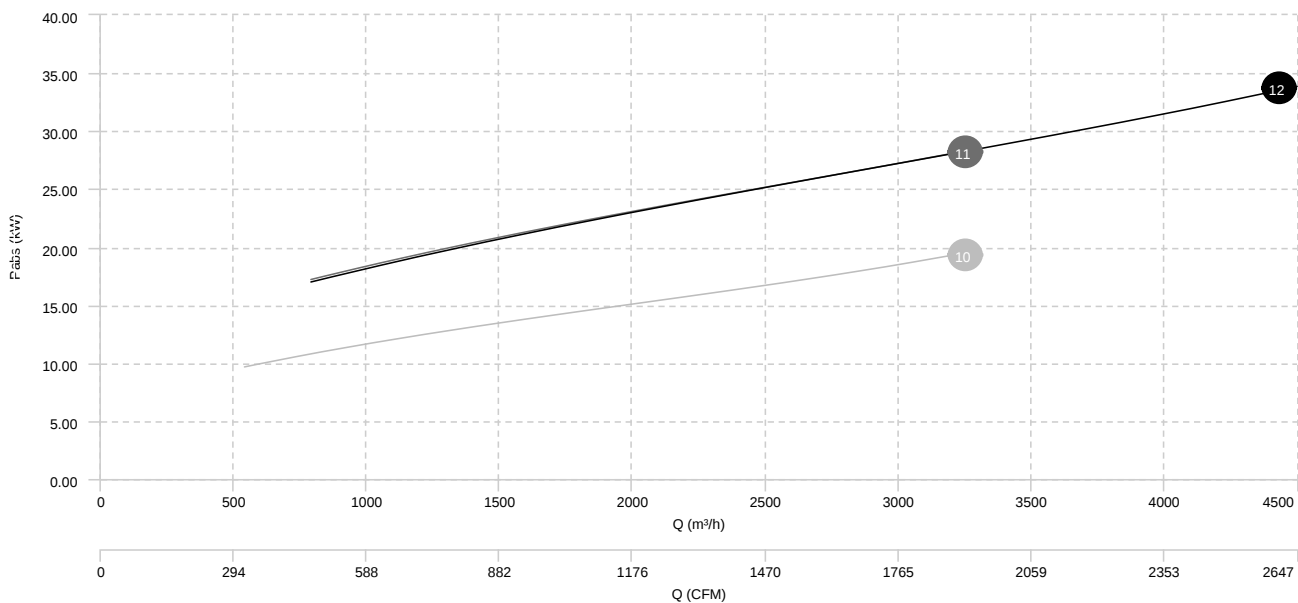

Sound data

Sound / 2 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
AAVC/N 500 T2 1,5kW ATEX	Inlet	92	59	74	82	90	91	90	82	83
AAVC/N 560 T2 2,2kW ATEX	Inlet	94	61	75	84	92	93	92	84	84
AAVC/N 630 T2 4kW ATEX	Inlet	98	65	80	88	96	97	96	88	89
AAVC/N 630 T2 5,5kW ATEX	Inlet	98	66	80	89	97	98	96	88	89
AAVC/N 710 T2 7,5kW ATEX	Inlet	102	70	84	93	101	102	100	92	93
AAVC/N 710 T2 11kW ATEX	Inlet	103	70	85	93	101	102	101	93	94
AAVC/N 800 T2 11kW ATEX	Inlet	106	73	88	96	104	105	104	96	97
AAVC/N 800 T2 15kW ATEX	Inlet	107	74	89	97	105	106	105	97	98
AAVC/N 900 T2 18,5kW ATEX	Inlet	109	76	91	99	107	108	107	99	100
AAVC/N 900 T2 22kW ATEX	Inlet	109	77	91	100	108	109	107	99	100
AAVC/N 1000 T2 37kW ATEX	Inlet	113	80	95	103	111	112	111	103	104
AAVC/N 1000 T2 45kW ATEX	Inlet	114	81	96	104	112	113	112	104	105
AAVC/NR 500 T2 1,1kW ATEX	Inlet	91	58	73	81	89	90	89	81	82
AAVC/NR 560 T2 1,5kW ATEX	Inlet	93	60	75	83	91	92	91	83	84
AAVC/NR 630 T2 3kW ATEX	Inlet	96	63	78	86	94	95	94	86	87
AAVC/NR 630 T2 4kW ATEX	Inlet	96	64	78	86	95	96	94	86	87
AAVC/NR 710 T2 5,5kW ATEX	Inlet	101	69	83	91	100	101	99	91	92
AAVC/NR 710 T2 7,5kW ATEX	Inlet	102	69	84	92	100	101	100	92	93
AAVC/NR 800 T2 7,5kW ATEX	Inlet	105	72	87	95	103	104	103	95	96
AAVC/NR 800 T2 11kW ATEX	Inlet	106	73	88	96	104	105	104	96	97
AAVC/NR 900 T2 15kW ATEX	Inlet	108	75	90	98	106	107	106	98	99
AAVC/NR 900 T2 18,5kW ATEX	Inlet	109	76	91	99	107	108	107	99	100
AAVC/NR 1000 T2 30kW ATEX	Inlet	112	79	94	102	110	111	110	102	103
AAVC/NR 1000 T2 37kW ATEX	Inlet	113	80	94	103	111	112	111	103	104